




USER MANUAL


Control box for DC obstruction lights

OBSTALINK-DC // 114800

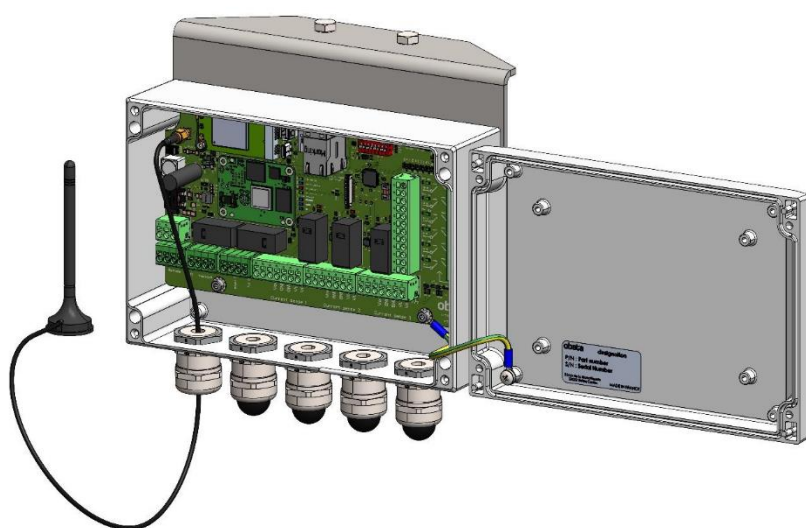

1. Product name and part number	3
2. Caution	4
3. Warranty	5
4. Introduction	6
4.1. General information	6
4.2. Description	6
4.3. Operation	7
5. Installation	8
5.1. Unpacking	8
5.2. Overview	8
5.3. Mounting	9
6. Wiring	10
6.1. Caution before wiring	10
6.2. Overview	11
6.3. Cable gland installation	13
6.4. Typical wiring	14
7. Startup and configuration	16
7.1. Power-up	16
7.2. Configuration	16
7.2.1. Dipswitches 1 (SW1)	16
7.2.2. Dipswitches 2 (SW2)	16
7.3. DTN and default led	17
8. Maintenance	18
9. Technical specifications	18

1. Product name and part number

Description	Part number (P/N)	Power supply	QR code
OBSTALINK-DC	114800	8-56Vdc	

2. Caution



- Do not proceed with any maintenance job when the product is under operation.
- Power supply must be shut down when opening the flash-head or the cabinet.
- Installation must be performed only by an electrically skilled operator and National electrical installation rules must be respected.
- Always wear appropriate Personal Protective Equipment (PPE) when installing, maintaining or servicing the system.
- Any installation or maintenance operation performed at height must be carried out in strict compliance with fall-protection procedures.
- Do not look directly at the projector while it is in operation: Led projectors produce brilliant flashes of lights which can result in temporary or permanent eye damage.
- OBSTA products may be affected by ESD, use state of the art precaution before manipulation.
- Unless otherwise specified, all cables must be shielded, and the shielding must be connected to ground.
- All cables connected to PCBs and terminal blocks must be equipped with a cable connector to prevent false contacts when connecting devices.



3. Warranty

OBSTA warrants the equipment described in the instruction manual and sold to purchasers to be free from defects in material and workmanship at the time of shipment. OBSTA's liability under this warranty being limited to repairing or replacing, at OBSTA's option, items which are returned to it prepaid within twenty-four (24) months from shipment to the original Purchaser, or twelve months from commissioning, and found, to OBSTA's satisfaction, to have been defective. In no event shall OBSTA be liable for consequential damages. NO PRODUCT IS WARRANTED AS BEING FIT FOR A PARTICULAR PURPOSE AND THERE IS NO WARRANTY OF MERCHANTABILITY.

This warranty applies only if: (I) the items are used solely under the operating conditions and in the manner recommended in OBSTA's instruction manual, specifications, or other literature; (II) the items have not been misused or abused in any manner or repairs attempted thereon; (III) written notice of the failure within the warranty period is forwarded to OBSTA and the directions received for properly identifying items returned under warranty are followed; and (IV) such return notice authorizes OBSTA to examine and disassemble returned products to the extent OBSTA deems necessary to ascertain the cause of failure. The warranties stated herein are exclusive.

THERE ARE NO OTHER WARRANTIES, EITHER EXPRESSED OR IMPLIED, BEYOND THOSE SET FORTH HEREIN, and OBSTA does not assume, nor does OBSTA authorize anyone else to assume for it, any other obligation or liability in connection with the sale or use of said products. OBSTA's liability on any claim of any kind, including negligence, for loss or damages arising out of or connected with the manufacture, sale, delivery, repair or use of any equipment or services provided by OBSTA shall in no case exceed the price allocable to the item or service or part thereof which gives rise to the claim.

The integrity and reliability of OBSTA aviation obstruction lighting systems is dependent on the use of OBSTA parts and components. To ensure the optimum performance and reliability of your OBSTA system, it is strongly advised that only components and modules manufactured by OBSTA be used.

4. Introduction

4.1. General information

This document defines the detailed requirements of the IOT-GATEWAY project, manufactured by OBSTA, describing its functional behavior.

The IOT-GATEWAY acts as a gateway between monitored devices (lighting, etc.) and a control/monitoring system.

The OBSTALINK-DC operates with 12Vdc, 24Vdc, and 48Vdc power supplies, with a maximum allowable voltage of 56 VDC.

4.2. Description

- Aluminum case 240x160x85mm.
- Several connection terminals for periodic status checks on all brands of beacon lights operating at 10 to 60 Vdc.
- Dipswitch for card configuration.
- MODEM: Connects to the Internet via the mobile network.
- Raspberry module: Saves and launches the installed program.
- Micro SIM: Allows the MODEM to connect to the network.
- Ethernet: Provides a stable and fast internet connection.
- USB A and C ports: Allows you to connect peripherals and/or transfer and exchange data.
- Possible connection of a photocell.

4.3. Operation

- Lamp control.
- Monitoring the power source of beacons.
- Monitoring of instantaneous consumption for up to 3 lamps (or 3 lamp groups depending on wiring).
- Telemetry.
- Definition of alarm thresholds and alert Emails (NOTAM) on the *monitoring.taack.com* website.
- In the event of a power failure, send an error message before the system shuts down completely.

Beacon dry contact:

Connect the beacons to dry contact. To test whether the beacon has a problem, press the "tact switch". If the green LED lights up, the beacon is OK.

On the dry contact connector per channel there is a 5Vdc logical signal emitted and Input to check the beacon.

For dry contact connection in normal mode (no default) the "OBSTALINK DC" is expecting to receive the 5Vdc signal emitted by the connector. That means the beacon must be cabled in a way that allows this signal to be going through when everything is operating normally.

Photocell:

A photocell can be connected for the Dya, Twilight and Night (DTN) detection. For connection, see Photocell instruction (P/N: 100756 or 100757)

Current sense:

Continuously measures the current flowing through the connected beacons and determines the presence or absence of faults. 3 Connection terminals are available (1 per beacon).

Raspberry / MODEM:

A Raspberry module 4 board and a MODEM are added to the main board for program management (Raspberry) and 2G/3G/G data management (MODEM)

USB / Ethernet / SIM

- *USB-C is used for programming the Raspberry. When in use, all other peripherals are disabled.*
- *The USB-A port is used as a peripheral port (for keyboard, mouse, etc.).*
- *The SIM port is used for the MODEM*
- *Ethernet connection is possible at 100 to 1000 Mb per second (only on the top port).*


5. Installation

5.1. Unpacking

Carefully unpack the product and remove any internal packing material. Examine each item for obvious physical damage. Immediately report any claims to the carrier.

It's strongly recommended to supply the product and verify that it's working properly at ground level before final installation.

5.2. Overview

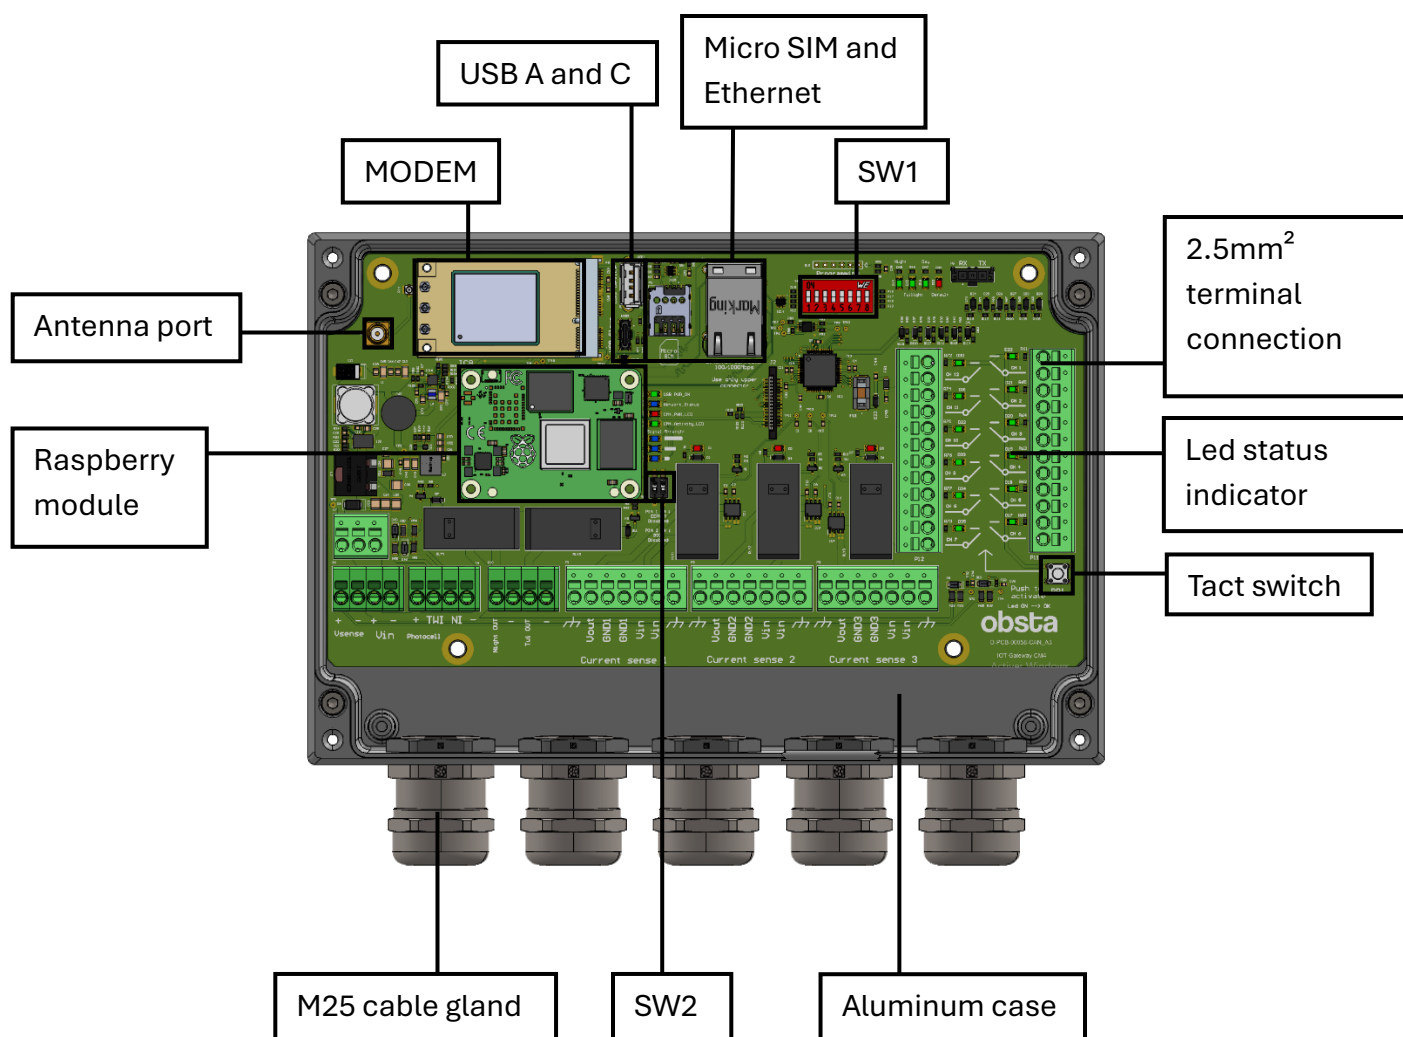

OBSTA

3, impasse de la blanchisserie
51052 Reims CEDEX – France


This document is the property of OBSTA. It may not be reproduced or communicated to third parties without the written permission of OBSTA

5.3. Mounting


The IOT assembly fixture must be mounted perfectly horizontally. If mounted in any other position, the product will not be able to meet its intended sealing requirements.

We recommend that the metallic base of the product be connected through a grounding kit to the local grounding of the tower.

We strongly recommend taping the cable glands through which the connection cables pass after tightening.

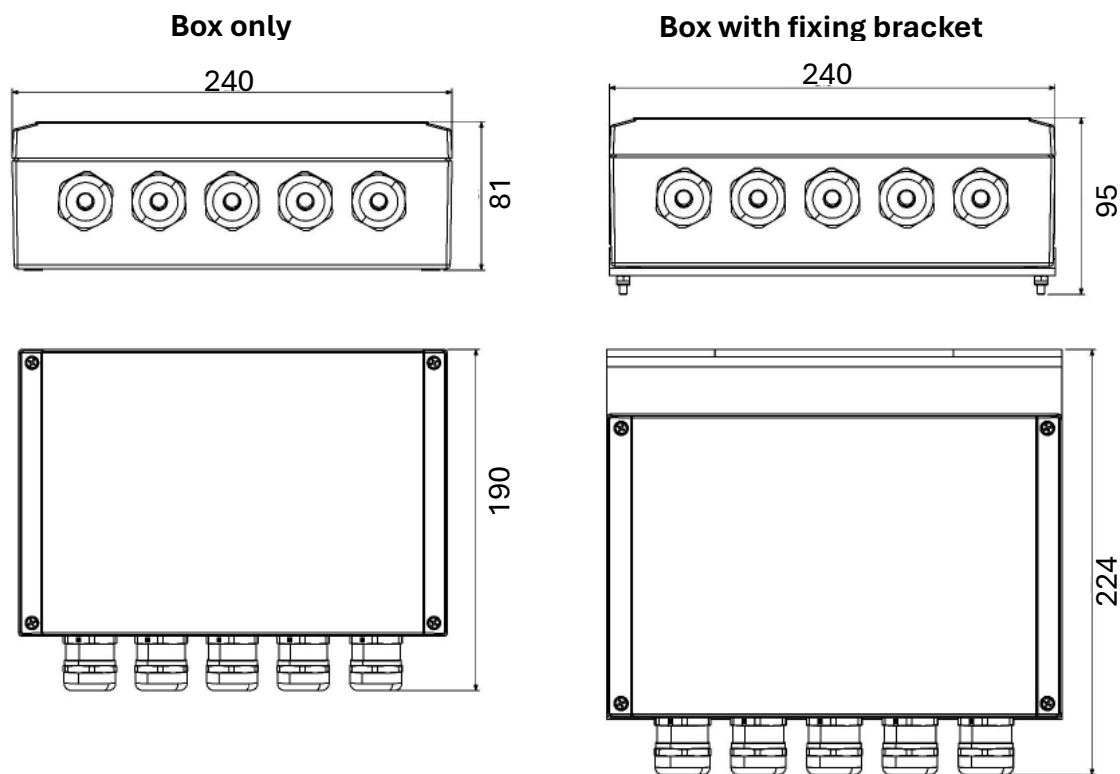

The enclosure is assembled using the four 4.2 mm diameter holes. OBSTA recommends using M4x16 screws with lock nuts.

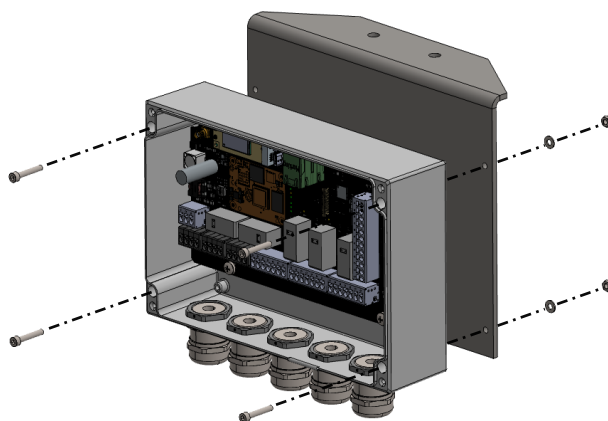

OBSTA
3, impasse de la blanchisserie
51052 Reims CEDEX – France


This document is the property of OBSTA. It may not be reproduced or communicated to third parties without the written permission of OBSTA

6. Wiring

6.1. Caution before wiring


- **Power OFF:** Always ensure the main power supply is completely turned off before starting any wiring work.
- **Verify voltage:** Confirm the voltage level of the circuit. Be aware of high-voltage hazards.
- **Use proper PPE:** Wear personal protective equipment (insulated gloves, safety glasses and safety shoes).
- **Secure the work area:** Ensure the area below is cordoned off to prevent injury from falling tools or components.
- **Check equipment ratings:** Confirm the product's voltage and current ratings match the installation circuit.
- **Inspect components:** Examine all parts (wires, connectors, terminals) for damage before wiring.
- **Proper tools:** Use insulated tools appropriate for electrical work.
- **Follow wiring diagram:** Refer to the OBSAT's schematic to ensure correct connections.
- **Grounding:** verify proper grounding/earthing for all metal parts and enclosures.
- **Secure wiring:** Fasten cable properly to prevent strain, chafing, or accidental disconnection.
- **Verify before powering:** Double check all connections before restoring power.
- **Shielded cable:** Cables must be shielded when used in electromagnetic fields.
- **Position:** The lamps shall be installed as close as possible from the command box from it using a 2x1.5mm² cable.
- **Number of lamps:** If more than 1 lamp is connected on "1st" or "2nd", all lamps must be wire in parallel.
- **Polarities:** The polarities must be correctly positioned on the DC power supply (for models 113915 and 113915-SOL). If reversed, the printed circuit board may be seriously damaged.
- **Configuration:** Do not forget to set the dipswitches as required by the warning lights: Unless specified, dipswitch settings configurations are factory preset in active redundancy (1 main light and 1 optional back-up light) at night operation only (photo sensor activated).
- **Two product references are available:** Connected devices will be powered by the OFC-CTR input voltage. The maximum current allowed for this product is 10A.

6.2. Overview

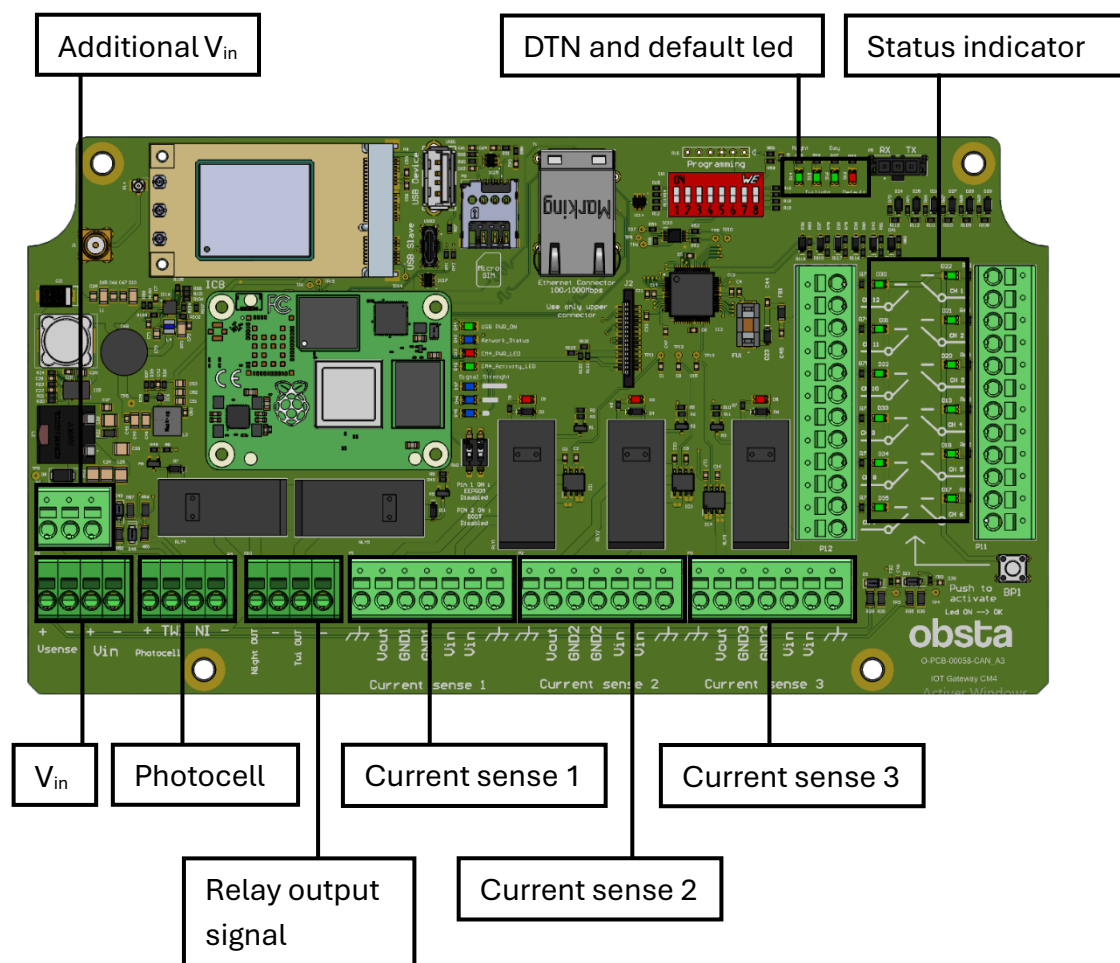

All connector described as follows have a compatibility of 2.5mm²:

Screen printing	Function	Wiring (diagram)
Vin (+ -)	Power supply	10 to 60 Vdc (DC power supply coming from DC UPS or solar kit)
Photocell (+ TWI NI -)	Detects change between day, dusk, and night and trigger a change in the status of the beacons.	Photocell
Night OUT - Twi OUT -	Distribute +12 Vdc from photocell to beacons	Jumper +12 Vdc input
Current sense 1 to 3	Beacon connection	+12 Vdc output
CH 1 to 12	Beacon state relay	Channel 1 to 6 (7 to 12 not represented)

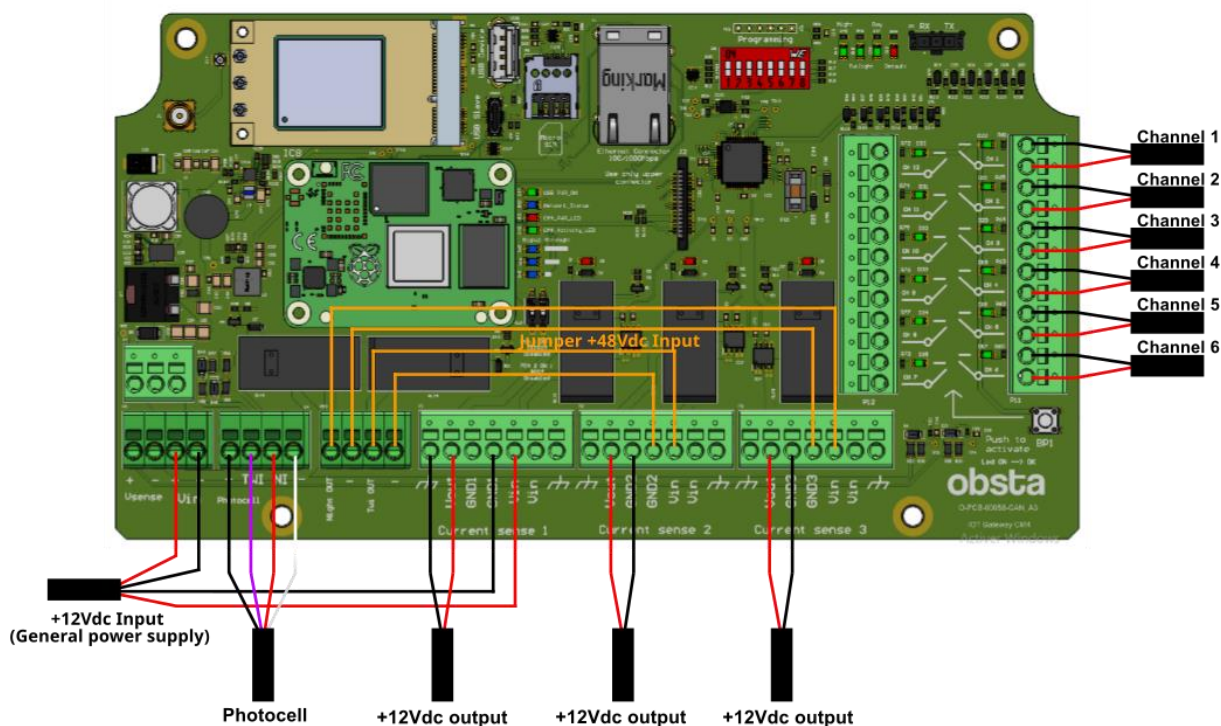

OBSTA


3, impasse de la blanchisserie
51052 Reims CEDEX – France

This document is the property of OBSTA. It may not be reproduced or communicated to third parties without the written permission of OBSTA


6.3. Cable gland installation

As a reminder, all shielded cables must be earthed at both ends. It is the installer's responsibility to check that OBSTA cabinets and lamps are correctly wired.

- Strip excess cable length to expose shielding.
- Leave 15mm of shielding, strip the rest.

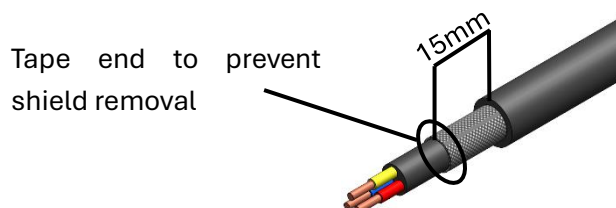

- Thread the cable through the cable gland (the ring is loosened but not removed) so that the shield is in contact with the gland springs.
- The gasket must be correctly positioned flat and in its housing for optimum sealing.

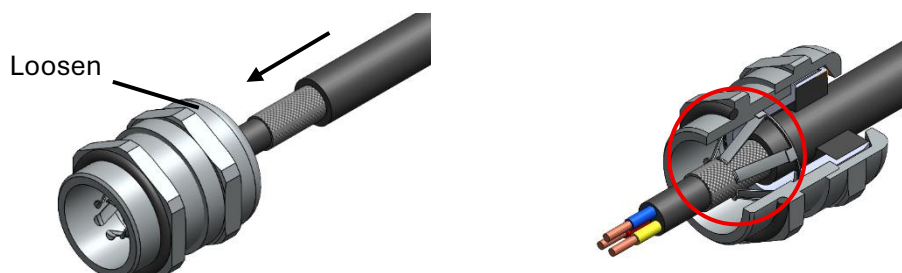


- Tighten the gland ring with the appropriate wrench.
- Once the cable has been clamped in the cable gland, cut and strip the wires to the length required to connect the terminal blocks (don't forget to fit cable ferrules before connection).

CEM	Cable diam min (mm)	Cable diam max (mm)	Pressure nut wrench	Locknut wrench
M25	9	17	29	29

6.4. Typical wiring

The following typical wiring are provided for illustrative purposes only.

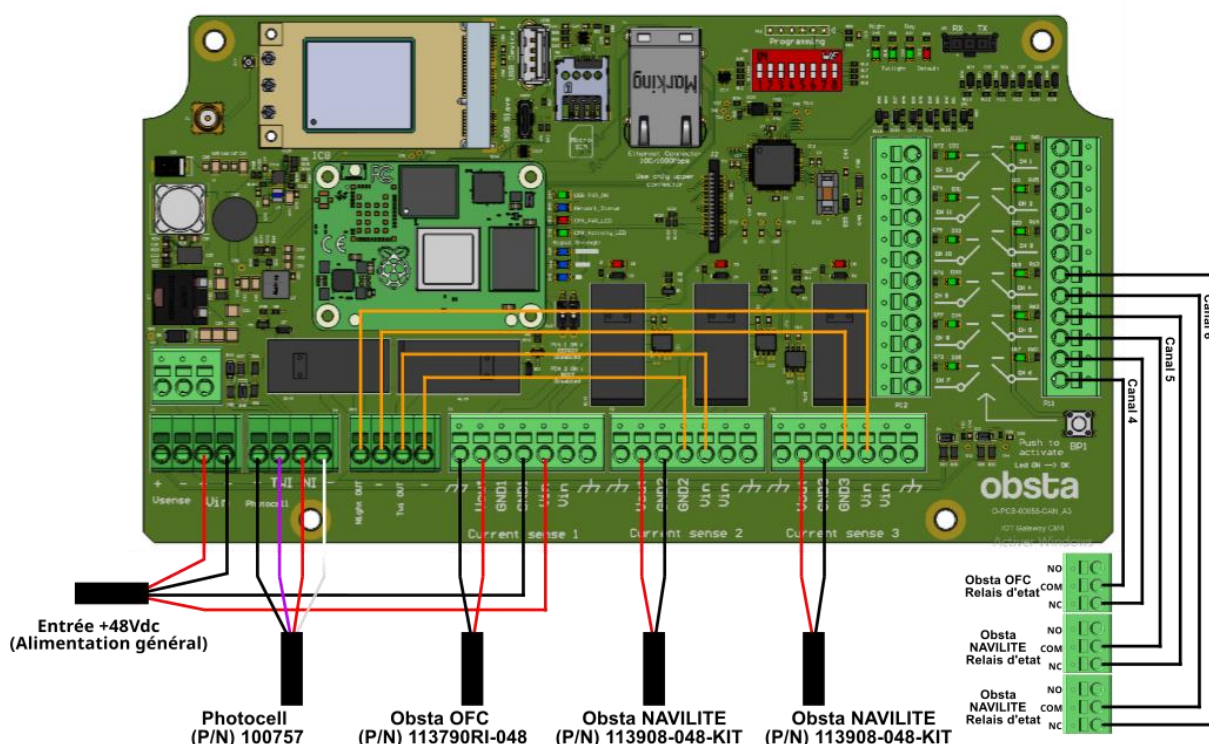


Explanation of this example of wiring:

- The photocell is connected to the main power supply.
- The OFC is connected directly to the 48 Vdc power supply, allowing it to operate continuously or in a flashing mode (for example, 40 FPM with a 300ms duration) day and night. In this case, the flash setting is configured on the OFC unit, and the server verifies the correct flash rate and duration via current analysis.
- The NAVILITE connected to current sense 2 is powered by the photocell's 48 Vdc twilight output (TWI OUT/-). In this configuration, the NAVILITE is a steady red light and will switch on when the photocell enters twilight mode? The server will then verify the correct current consumption only during the twilight period.
- The NAVILITE connected to current 3 is powered by the photocell's 48Vdc night output (NIG OUT / -). In this configuration, the NAVILITE is also a steady red light and will switch on when the photocell enters night mode. The server will then verify the correct current consumption only during the night period.
- Optionally, the alarms “normally close” for all three beacons can also be connected, allowing for real-time status monitoring via channels 4, 5 and 6 in addition to the current analysis.

OBSTA
3, impasse de la blanchisserie
51052 Reims CEDEX – France

This document is the property of OBSTA. It may not be reproduced or communicated to third parties without the written permission of OBSTA.

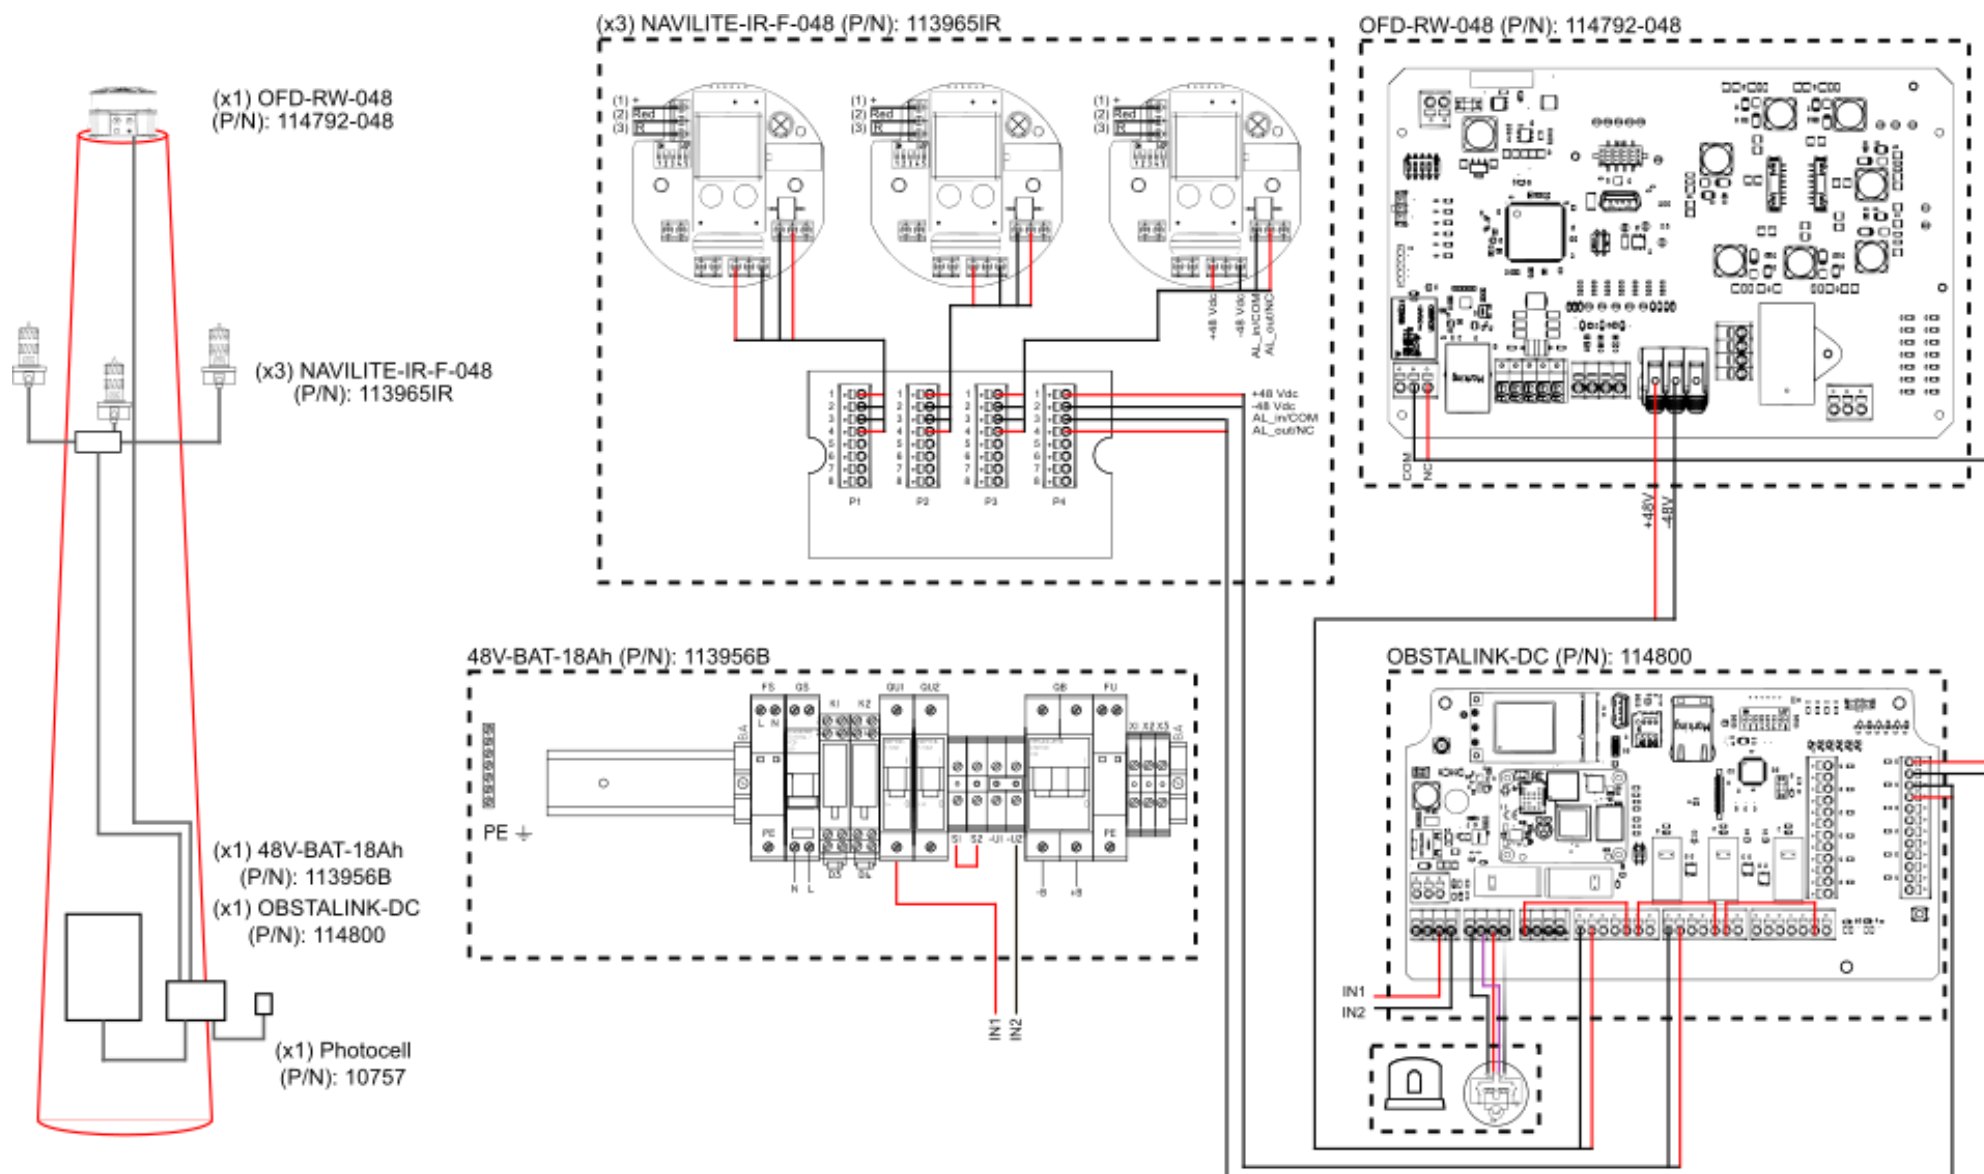

7. Startup and configuration

7.1. Power-up

Before turning on the power, ensure that all electrical connections are properly made and that the supply voltage matches the product specifications. Check that the wiring is secure and that there are no bare wires or conductive elements that could cause a short circuit.

7.2. Configuration

7.2.1. Dipswitches 1 (SW1)

SW1								
N°	1	2	3	4	5	6	7	8
ON	Current sense 1 used	Current sense 2 used	Current sense 3 used	DTN 1	DTN 1	Reserved		
OFF	Current sense 1 not used	Current sense 2 not used	Current sense 3 not used	DTN 0	DTN 0			

SW2-4	SW2-5	Force Day, Twilight, Night mode (DTN)
0	0	Do not force mode
1	0	Force Night mode
0	1	Force Day mode
1	1	Force Twilight mode

7.2.2. Dipswitches 2 (SW2)

SW2 is required to manage the raspberry module.

SW2		
N°	1	2
ON	EEPROM disabled	Boot disabled
OFF	-	-

7.3. DTN and default led

LED	Behavior		
	Init (3s)	After init, if no internet	Nominal operation
Default	ON	OFF	OFF if no default. Displays sequence of highest priority if default.
Day	ON	Flash (100ms period)	If corresponding mode is forced: Fast blinking every 100ms for 1sec every 4sec Else: ON for sec every 4sec
Twilight	ON		
Night	ON		

In the event of a major failure resulting in a complete shutdown of the OBSTALINK-DC system, the operation of the condition of the connected beacons remains unaffected. They continue to operate normally in autonomous mode.

OBSTALINK-DC goes in default given any of the following conditions (in priority order):

Default	Condition	Red led signal
External communication problem	Internet communication via 2G, 3G, 4G modem is down.	— — 2 long
Internal monitoring problems	At least one error encountered in the last 60 seconds.	— . 1 long and 1 short
DTN mode unchanged	The DTN mode did not change for the last 48 Hours	— 1 long
Light alarm	At least one configured dry input is on open circuit.	. 1 short
Configuration	The channel is not configured but dry input is detected.	— . . . 1 long and 3 short
Not enough disk space	There is less than 5% of free disk space.	— — . . 2 long and 2 short

8. Maintenance

Test	Frequency	Preventive action	Risk
Wiring	Annual	Visual control Tightening PCB wires Tightening PCB wires	Cable degradation Poor contact Lamp in default mode
Waterproof	Annual	Visual verification	Water infiltration Short circuit Lamp off
Clamping	Annual	Checking tightness	Box falling Tightness degradation
Aspect (rust, dust...)	Annual	Exterior cleaning	Malfunction

9. Technical specifications

Designation	Min	Nominal	Max	Unit
DC version				
Power supply (V_{in})	8	12	56	Vdc
Input current at 12Vdc	140	-	650	mA
Startup inrush current at 12Vdc	500	-	1200	mA
Power average at 12Vdc	-	2.4	1200	mA
Maximum power during over the air communication	-	-	8	W
Signal				
Dry contact output voltage	4.8	5	5.2	Vdc
Dry contact input voltage	-	5	5.2	Vdc
High level input voltage for dry contact	4	-	-	Vdc
Voltage sensor for external analog signal	0	-	V_{in}	Vdc
Photocell				
PSU voltage for photocell	-	V_{in}	-	Vdc
Input voltage for twilight and night signals	10	-	60	Vdc
High output voltage for twilight and night signals	$V_{in}-1$	V_{in}	$V_{in}+1$	Vdc
Current sense				
Current for beacon sensing 1	0	-	5	A
Current for beacon sensing 2	0	-	10	A
Current for beacon sensing 3	0	-	10	A
Current for beacon relay (at 24Vdc)	-	-	16	A
Current for beacon relay (at 48Vdc)	-	-	5	A
Operating environments				
Temperature	-35	-	+55	°C
Norm	-	66	-	IP

OBSTA

3, impasse de la blanchisserie
51052 Reims CEDEX – France

This document is the property of OBSTA. It may not be reproduced or communicated to third parties without the written permission of OBSTA