


Stainless control and battery cabinet to be used with any OBSTAFLASH 48VDC or OBSTA STI 48VDC



- ✦ Stainless enclosure
- ✦ 4 batteries 12Ah 12Vdc
- ✦ Protection against deep discharge batteries
- ✦ Test button with 3 positions: 'remote', 'day', 'night' with interlock switch
- ✦ Surge protection on AC and DC sides
- ✦ Terminal connection for photocell, alarm, and low intensity 48vdc lights working at night only,
- ✦ alarm for lights, battery and charger

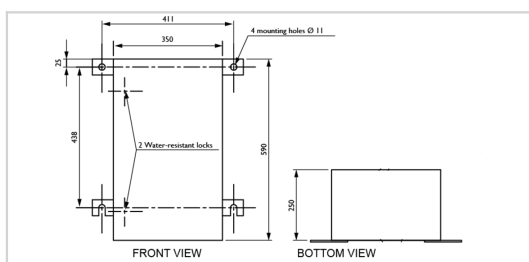

Electrical Characteristics	
Main voltage	230VAC +/-10%
Mechanical Characteristics	
IP degree	IP65 in vertical position
Wiring	Entry of cable by glands nickel plated brass and connection by terminals
Operating temperature	-20/+45°C
Weight	10 kg
Size of the power supply	590mm (height) x 350mm (width) x 250mm (dept)
Wire cross section	from 1 to 4 mm <sup>2</sup>