




- ✦ Stainless enclosure
- ✦ Protection against deep discharge batteries
- ✦ Test button with 3 positions: 'remote', 'day', 'night' with interlock switch
- ✦ Surge protection
- ✦ Suitable for OBSTAFLASH dual color P/N113731 or 6 led projectors P/N113761 connected through a junction box P/N113748 and a cable P/N113762
- ✦ 4 alarms (1 per light, 1 for the charger and 1 for the 4 batteries)
- ✦ Terminal connection for photocell, alarm, and low intensity 48vdc lights working at night only, different levels of alarms available

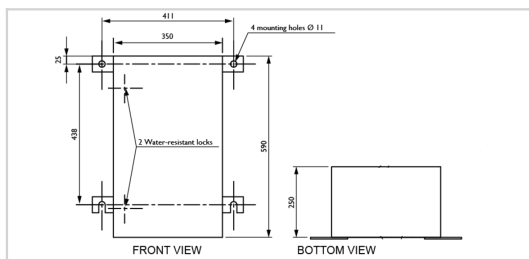

| Electrical Characteristics | |
|----------------------------|--|
| Main voltage | 230VAC +/-10% |
| Mechanical Characteristics | |
| IP degree | IP65 in vertical position |
| Wiring | Entry of cable by glands nickel plated brass and connection by terminals |
| Operating temperature | -20/+45°C |
| Size of the power supply | 590mm (height) x 350mm (width) x 250mm (dept) |
| Wire cross section | from 1 to 4 mm ² |