




- ✦ Stainless enclosure
- ✦ Protection against deep discharge batteries
- ✦ Test button with 3 positions: 'remote', 'day', 'night' with interlock switch
- ✦ Surge protection
- ✦ Suitable for OBSTAFLASH dual color P/N113731 or 6 led projectors P/N113761 connected through a junction box P/N113748 and a cable P/N113762
- ✦ 4 alarms (1 per light, 1 for the charger and 1 for the 4 batteries)
- ✦ Terminal connection for photocell, alarm, and low intensity 48vdc lights working at night only, different levels of alarms available

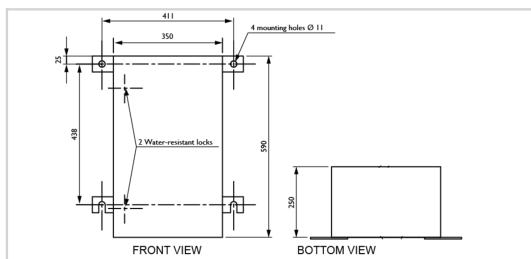

Electrical Characteristics	
Main voltage	230VAC +/-10%
Mechanical Characteristics	
IP degree	IP65 in vertical position
Wiring	Entry of cable by glands nickel plated brass and connection by terminals
Operating temperature	-20/+45°C
Size of the power supply	590mm (height) x 350mm (width) x 250mm (dept)
Wire cross section	from 1 to 4 mm <sup>2</sup>