


## Monitoring and control box



### Monitoring box

- ✦ painted and molded aluminum boxes
- ✦ cable inputs by gland nickel plated brass
- ✦ monitoring up to 6 lights in simultaneous operation (or 6 pairs of 2 lights main and back-up)
- ✦ connection of the photocell, the default information and the lights through additional junction box P/N113141
- ✦ 2 waterproof switches (on/off switch and remote/manual switch to bypass the photocell)
- ✦ led indicator for the presence of power supply voltage
- ✦ led indicator for the information lights switch on or switch off
- ✦ 2 led indicators for the status of the main lights and the back-up lights

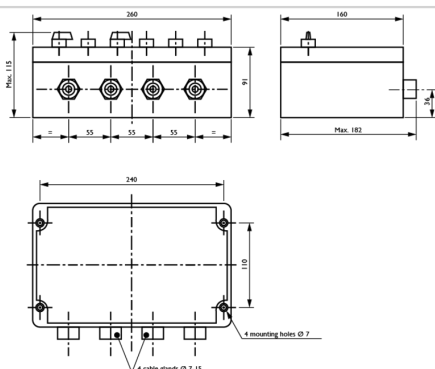

### Electrical Characteristics

Main voltage 230VAC +/-10%

### Mechanical Characteristics

IP degree IP65 in vertical position

Weight 2,8 kg

Weight 2,8 kg

Cable entry diameter from 8 to 15 mm

Wire cross section from 1 to 4 mm<sup>2</sup>

Attachment 4 screws type M5

