



Monitoring box allowing the control and the wiring of 2 NAVILITE 48VDC beacons, operating at night only or continuously, plugged to work simultaneously or in redundancy (a main light and a backup light working only in case the main light is not working) with remote

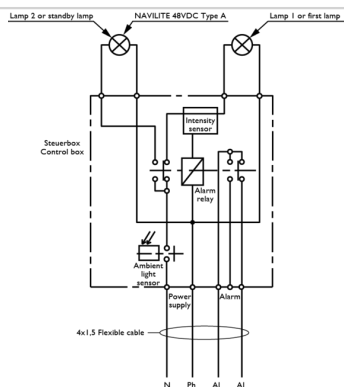

- Control 1 or 2 NAVILITE 48VDC either
  - with an active redundancy (one main lamp and one back-up lamp switched on in case of failure of the main lamp)
  - or a simultaneous operation of 2 lights
- Control the day/night switching of the lights
- Allow remote monitoring in case of lamp failure or power supply failure by potential free contact

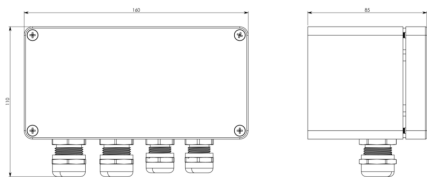

Conditions de mise en alarme :

- faible consommation de(s) lampe(s)
- mise en court-circuit de(s) lampe(s)
- manque d'alimentation

Alarm conditions :

- low intensity of the lamp(s)
- short-circuit of the lamp(s)
- power supply failure

#### Electrical Characteristics

Main voltage 48VDC (-10%; +15%)

#### Mechanical Characteristics

IP degree IP65 in vertical position

Dimensions 160 x 58 mm

Weight 0.42 kg

Weight 300g

Cable entry diameter 6,5-12 mm & 4-10mm

Wire cross section from 1 to 2,5 mm²

Attachment 4 screws type M4

Position of the 4 mounting holes 148 x 50 mm