

Red OBSTAFLASH medium intensity flashhead including 6 red led projectors and a junction box to be used with the external obsta power cabinet. The complete product P/N113724 (flashhead P/N113736 + power supply P/N113727) is compliant with ICAO medium intensity



1966535B1 &amp; US 7816843


#### Flashhead

- ✦ 6 led projectors coming with molded cable
- ✦ 1 junction box
- ✦ Support for the 6 projectors and the junction box

This flashhead must be powered through obsta power cabinet.

- ✦ 110-240Vac power cabinet P/N113727 (for 1 up to 6 flashheads)
- ✦ 48Vdc power cabinet P/N113755 (for 1 up to 6 flashheads)

Patents: EP

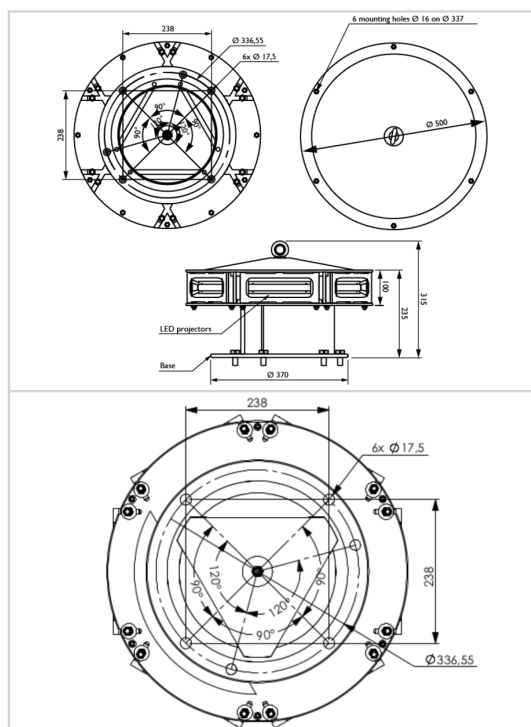

Mechanical Characteristics	
Operating temperature	-40/+55°C
Weight	5 kg
Size of the light	315mm (height) x 500mm (diameter)
Photometric Characteristics	
Effective light output night mode at 0° on site	2000cd (red) with IR
Color night time	Red
Horizontal beam spread	360°
Standards	
Standards compliance	ICAO annex 14 chapter 6, FAA (AC 150/5345-43H), EASA, DGAC, CAA (CAP 168)