


## Led low intensity type B



- ✦ Completely molded and perfectly waterproof
- ✦ Bird spike
- ✦ No grounding issue, class II
- ✦ Total 192 leds wired in 48 independant circuits of 4 leds each
- ✦ Luminous intensity 3 times higher than ICAO/FAA requirements

The stainless bracket P/N113920 should be ordered separately

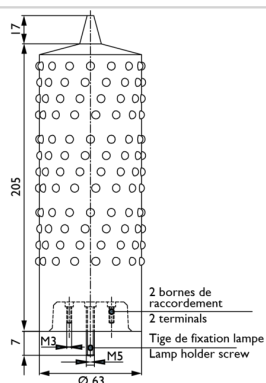

### Electrical Characteristics

Wattage	12 W
Current drawn	500 mA
Life time	~10years
Main voltage	24VDC (-10%; +15%)

### Mechanical Characteristics

IP degree	IP66
Wiring	Terminal connection by 2 pods
Operating temperature	-40/+55°C
Weight	0.99 kg
Size of the light	194mm (height) x 63mm (over diameter)
Weight	950 g
Attachment	1 screw M5 provided

### Photometric Characteristics

Luminous intensity	> 90 Cd
Color night time	Red fixed
Vertical beam spread	>10°
Horizontal beam spread	360°

### Standards

Standards compliance	ICAO annexe 14 chapter 6 (8th edition 07/2018), EASA (4th edition 2017)
----------------------	---

