


Red fixed low intensity type A and B



- ✦ Light part completely molded with 4 levels of leds
- ✦ Redundant circuits for LED's : 16 circuits of 4 LEDs in redundancy
- ✦ No rise from the ground potential (due to lightning for example)
- ✦ Bird spike

The stainless bracket NAVILITE-HOLDER for mounting shall be order separately

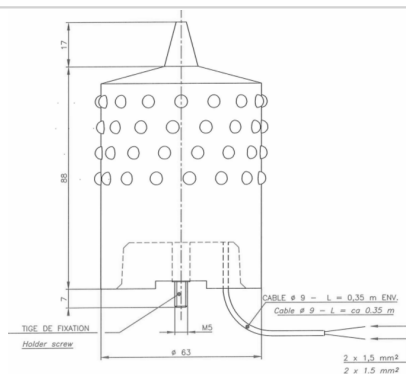

Electrical Characteristics

Wattage	6 W
Current drawn	250 mA
Life time	~10years
Main voltage	24VDC (-10%; +15%)

Mechanical Characteristics

IP degree	IP66
Wiring	On stripped wires (molded cable lenght 35cm) (2 power wires)
Operating temperature	-40/+55°C
Weight	0.42 kg
Size of the light	112mm (height) x 63mm (over diameter)
Weight	370g
Attachment	1 screw M5 provided

Photometric Characteristics

Luminous intensity	> 32cd
Color night time	Red fixed
Vertical beam spread	>10°
Horizontal beam spread	360°

Standards

Standards compliance	ICAO annexe 14 chapter 6 (8th edition 07/2018), EASA (4th edition 2017)
----------------------	---

