



Photocell for night only operation for all OBSTA 24Vdc lights or for the change of color & intensity twilight/night of the XENON obstafash series



- ✦ plug-in modular construction with plated contact surfaces
- ✦ automatic control of the red or dual obstruction lighting according to ambient light in compliance with FAA and ICAO twilight/night triggering level
- ✦ timer to prevent the functioning of the cell at inopportune times (lightning)

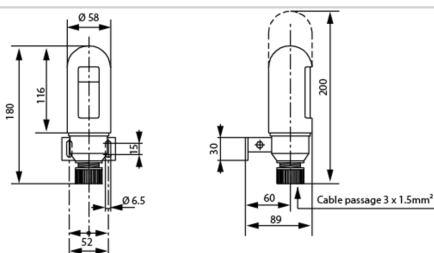

BRANCHEMENT  
Wiring



Electrical Characteristics	
Main voltage	24VDC (-10%; +15%)
Average wattage	1.5VA
Max. admissible current	10A contact closed in darkness
Mechanical Characteristics	
IP degree	IP67
Wiring	by 3 screw terminals
Operating temperature	-25°C/+60°C
Weight	300g
Wire cross section	up to 6mm <sup>2</sup>
Attachment	by harness and screws
Standards	
Standards compliance	ICAO annexe 14 chapter 6 (8th edition 07/2018), EASA (4th edition 2017)