


**The red medium intensity flashhead OBSTAFLASH180M&B (one main and one back-up) is designed for night marking of obstacle such as large stacks, intermediate pylons with 4 legs, facade of high rise buildings. A system that includes at least 2 OBSTAFLASH180M&B around the obstacle and an OBSTA power cabinet complies with ICAO red medium intensity and with FAA L-864.**

**113740  
red only  
"main and back-up"**




main: 1 red led circuit

back-up: 1 red led circuit normally off and switch on only in case of failure of the main circuit

This flashhead includes

- 6 led projectors coming with molded cable (first level with 3 main and second level with 3 back-up)
- junction box for the 6 projectors and the cable coming from the cabinet
- Stainless support for the 6 projectors and the junction box

This flashhead must be powered through obsta power cabinet P/N113732.

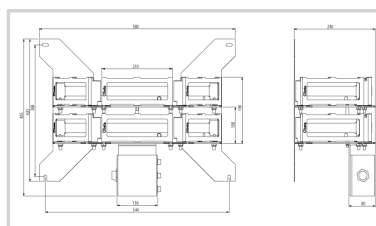

Mechanical Characteristics	
Wiring	Entry of cable by glands nickel plated brass and connection by terminals
Operating temperature	-40/+55°C
Weight	9kg
Size of the light	420mm (height) x 580mm (width)
Photometric Characteristics	
Effective light output night mode at 0° on site	2000cd (red) with IR
Color night time	Red
Horizontal beam spread	360° with minimum 2 flashheads on opposite side
Standards	
Standards compliance	ICAO annex 14 chapter 6, FAA (AC 150/5345-43H), EASA, DGAC, CAA (CAP 168)