


110VAC to 240VAC stainless power cabinet for 2 obstafash  
P/N113736 (or 12 red projectors)



Power supply

- ✦ 'Weather tight' stainless steel 316L power cabinet enclosure
- ✦ one luminous indicator per red circuit,
- ✦ maximum 36 red obstafash projectors
- ✦ Test button for remote (photocell), day and night position
- ✦ Alarm dry contact NC and NO
- ✦ Master/slave configuration in case of multiple lights synchronisation through cable between the cabinets or wireless through GPS inside each cabinet
- ✦ Surge protection
- ✦ in option side lights L810 / low intensity type B for night only operation (or L810(F))

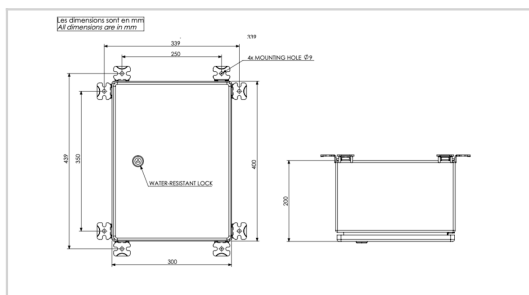

Electrical Characteristics	
Main voltage	110VAC to 240VAC +/-10% 50/60Hz
Mechanical Characteristics	
IP degree	IP65 in vertical position
Operating temperature	-40/+55°C
Wire cross section	from 1 to 4 mm <sup>2</sup>