


## 230VAC Power supply for 6 white flashheads OBSTAFLASH120 P /N113747M



- 'Weather tight' stainless steel 316L power cabinet enclosure
- cable entry for 6 OBSTAFLASH120 P/N113747M
- Luminous indicator for each white projector
- Test button for day and night
- Alarm dry contact NC and NO
- Master/slave configuration for multiple lights synchronisation
- Surge protection included 30KA in 8/20us wave
- to be used with photocell 48Vdc P/N100755
- in option wireless gps synchronisation P/N113746 and GSM diagnostic P/N113785

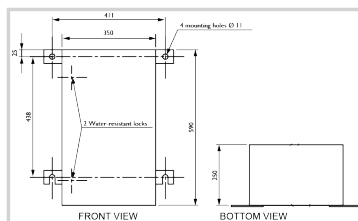

Electrical Characteristics	
Main voltage	230VAC +/-10%
Mechanical Characteristics	
IP degree	IP65 in vertical position
Wiring	Entry of cable by glands nickel plated brass and connection by terminals
Operating temperature	-20/+45°C
Size of the power supply	590mm (height) x 350mm (width) x 250mm (dept)
Wire cross section	from 1 to 4 mm <sup>2</sup>