

The red medium intensity type B or C flashhead OBSTAFLASH120 is designed for night marking of obstacle such as stacks, intermediate pylons with 3 legs, facade of high rise buildings. A system that includes 3 red OBSTAFLASH120 120° around the obstacle and an





EP3230651, FR1462349, Pat. 10,247,386

Patents:

This flashhead OBSTAFLASH120 red includes

- ✦ 2 led projectors in glass and aluminium coming with 0,75 meter of molded cable
- ✦ Stainless support with a junction box OFP-JB-2P-R for the cable going to power supply

This flash-head must be connected through a shielded cable 3G1,5 (directly or through an additional junction box) to an external obsta power supply to be ordered separately

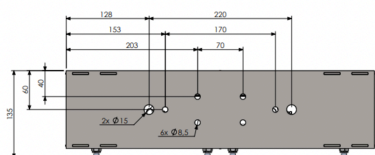

Electrical Characteristics	
Average wattage	8W (night time only @ 30fl per minute)
Mechanical Characteristics	
Wiring	Entry of cable by glands nickel plated brass and connection by terminals
Operating temperature	-40/+55°C
Weight	4.5 kg
Size of the light	120mm (height) x 480mm (width)
Weight	3,5kg
Photometric Characteristics	
Effective light output night mode at 0° on site	2000cd (red) with IR
Color night time	Red
Vertical beam spread	>3°
Horizontal beam spread	360° with minimum 3 flashheads fixed at 120° around the obstacle
Flash per minute	30
Standards	
Standards compliance	ICAO annex 14 chapter 6, FAA (AC 150/5345-43H), EASA, DGAC, CAA (CAP 168)