


Red fixed low intensity type A



- ✦ Light part completely molded with 4 levels of leds
- ✦ Redundant circuits for LED's : 16 circuits of 4 LEDs in redundancy
- ✦ Surge protection included in the body of the light
- ✦ Bird spike

The stainless bracket NAVILITE-HOLDER for mounting shall be order separately

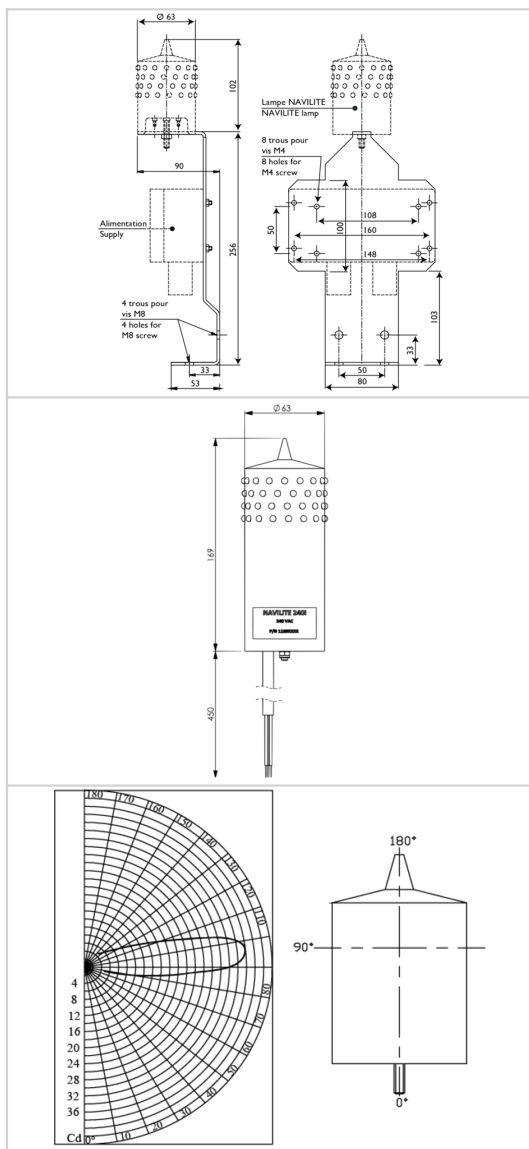

Electrical Characteristics	
Wattage	6 W
Current drawn	70 mA
Life time	~10years
Main voltage	110VAC to 240VAC +/-10% 50/60Hz
Mechanical Characteristics	
IP degree	IP66
Wiring	On stripped wires 3x1,5mm ² (2 power wires, 1 ground wire)
Operating temperature	-40/+55°C
Weight	0.66 kg
Size of the light	Ø x h :63 x 169 (mm)
Weight	950 g
Attachment	1 screw M5 provided
Photometric Characteristics	
Luminous intensity	> 10 Cd
Color night time	Red fixed
Vertical beam spread	>10°
Horizontal beam spread	360°
Standards	
Standards compliance	ICAO annexe 14 chapter 6 (8th edition 07/2018), EASA (4th edition 2017)