





Controller for high intensity and white or dual color medium intensity obstruction light system This controller allows to have at the bottom of the obstacle a precise diagnostic of obstruction lights on the tower and remotely on a web server.

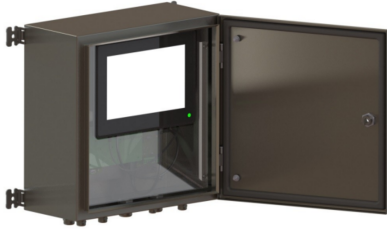

- ✦ allows the maintenance, the configuration, the installation and the administration up to 64 medium or high intensity OFH series obstruction lights through one single control cable
- ✦ large touch screen
- ✦ status and telemetric, humidity and temperature of each flashing lights allowing precise diagnostic from the ground
- ✦ alarm threshold settings
- ✦ stainless cabinet with cable inputs by gland nickel plated brass
- ✦ surge protection
- ✦ connexion of an external photocell
- ✦ MQTT, Ethernet
- ✦ automatic notification
- ✦ external wireless 4G, LTE (2G 3G capable) modem in option

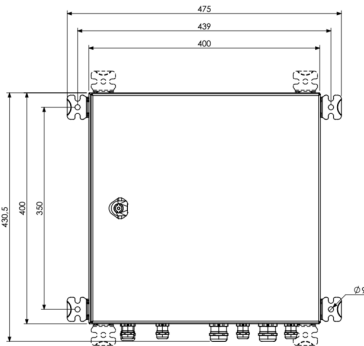

Les dimensions sont en mm
All dimensions are in mm



Electrical Characteristics	
Main voltage	110VAC to 240VAC +/-10% 50/60Hz
Mechanical Characteristics	
IP degree	IP65 in vertical position
Weight	5 kg
Size of the power supply	400mm (height) x 400mm (width) x 203mm (dept)
Weight	3,5kg
Cable entry diameter	from 8 to 15 mm
Wire cross section	from 1 to 4 mm ²
Attachment	4 screws type M5