




Double steady-burning light NAVILITE-F-120-240V should be installed when used as a top light in areas or locations where the failure of a single unit could cause an obstruction to be totally unlighted

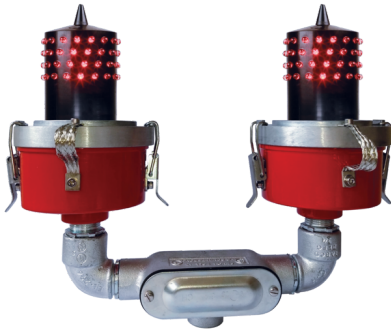

- ✦ 2 NAVILITE-F-48V (113965) and a bracket for the 2 lights (113928)
- ✦ Surge protection included
- ✦ 3/4" NPT threaded holes for mounting the system
- ✦ No losing part during installation

For "main and back-up" configuration and/or alarm relay normally open or normally close and/or night only operation and/or special blinking mode, a command box has to be ordered separately

Les dimensions sont en mm  
All dimensions are in mm



### Electrical Characteristics

Wattage	12 W
Life time	~10years
Main voltage	48VDC (-10%; +15%)

### Mechanical Characteristics

IP degree	IP65 in vertical position
Wiring	On 4 stripped wires (2 for each lamp)
Operating temperature	-40/+55°C
Weight	1.15 kg
Weight	3kg
Wire cross section	from 1 to 2,5 mm <sup>2</sup>
Attachment	vertical NPT threaded holes

### Photometric Characteristics

Luminous intensity	> 35 Cd
Color night time	Red fixed
Vertical beam spread	>10°
Horizontal beam spread	360°

### Standards

Standards compliance	ICAO annexe 14 chapter 6 (8th edition 07/2018), EASA (4th edition 2017)
Certification	FAA (AC 150/5345-43H) ETL verified