


Spare part for led lights

Power supply working with :

- up to 8 red medium intensity flash-head OFF-120-R-JB
- up to 3 dual color medium intensity OFF-120-RW-10 (or 4 in white only mode)
- or 1 high intensity flash-head OFF-FH-RW-120-6P
- 'Weather tight' stainless steel 316L power cabinet enclosure
- 8 independant power supplies providing a high redundancy level
- Test button for day, twilight and night
- Alarm dry contact NC and NO activated in case 1 or 2 led projectors not operating
- Surge protection included
- Controlled by internal GPS or external controller (to be ordered separately)
- GPS as a back-up (both flash and day/twilight/night mode) in case of default of external controller

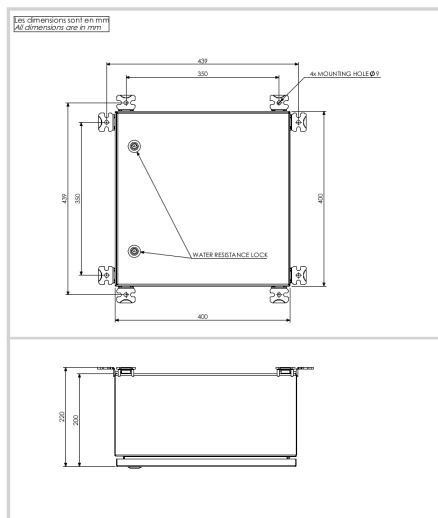

Electrical Characteristics	
Main voltage	110VAC to 240VAC +/-10% 50/60Hz
Mechanical Characteristics	
IP degree	IP66
Housing material	RAL7032 Steel
Weight	16 kg
Size of the power supply	590mm (height) x 350mm (width) x 250mm (dept)