

Spare part for led lights




Power supply

- ✦ 'Weather tight' stainless steel 316L power cabinet enclosure
- ✦ 8 independant power supplies providing a high redundancy level
- ✦ Test button for day, twilight and night
- ✦ Alarm dry contact NC and NO activated in case 1 or 2 led projectors not operating
- ✦ Surge protection included
- ✦ Controlled by internal GPS or external controller (to be ordered separately)
- ✦ GPS as a back-up (both flash and day/twilight/night mode) in case of default of external controller

To be used with obsta medium or high intensity flash-head(s)

- ✦ drive up to 12 obsta projectors (dual color mode) coming with molded cable

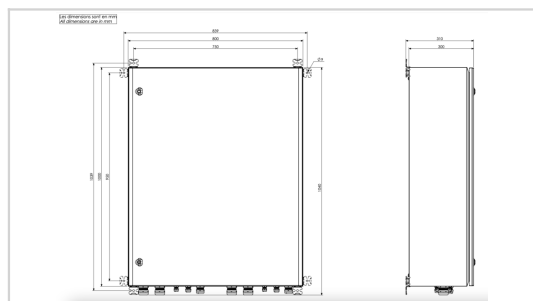

| Electrical Characteristics | |
|----------------------------|------------------------|
| Main voltage | 48VDC (-10%; +15%) |
| Mechanical Characteristics | |
| Weight | 30 kg |
| Size of the power supply | 1000mm x 800mm x 300mm |