



Spare part for led lights

Power supply cabinet

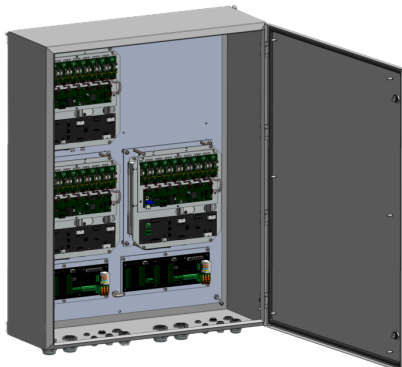

- ✦ Cabinet with key lock
- ✦ High level of redundancy for LED circuits
- ✦ Indicators of correct operation of floodlights and control signals with day-dusk-night test button
- ✦ Alarm via dry contact open or closed in the event of a power, synchronisation or floodlight fault
- ✦ Overvoltage protection included
- ✦ Synchronisation of multiple beacons via integrated GPS or external signals
- ✦ Back-up GPS for synchronisation of flashes and day/twilight/night mode changeover in the event of a controller fault
- ✦ Several configurations possible depending on the type (medium or high intensity) and topology of the beacons
- ✦ Low power consumption, proven lifetime

Translated with DeepL.com (free version) To be used with 3 obsta high intensity flash-heads OFP-120-RW-2-HIA with a junction box OFP-JB-8P

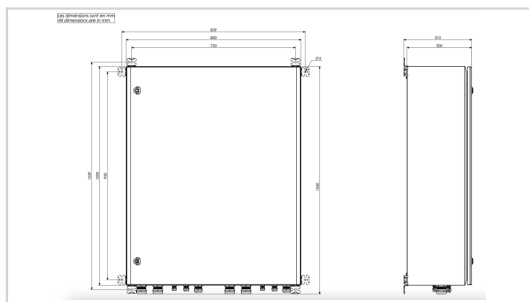

| Electrical Characteristics | |
|----------------------------|---------------------------------|
| Main voltage | 110VAC to 240VAC +/-10% 50/60Hz |
| Mechanical Characteristics | |
| Weight | 75 kg |
| Size of the power supply | 1000mm x 800mm x 300mm |