




## 48V NAV CTRL 12/24/48Vdc & 110/240Vac [P/N: 113913]

Monitoring box allowing the control and the wiring of 1 to 4 NAVILITE 48VDC red fixed low intensity with blinking infrared, operating at night only or continuously, plugged to work simultaneously with remote signalization in case of failure of the red or infrared circuits, or power

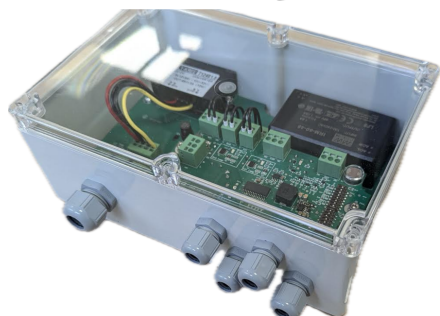

- ✦ Polycarbonate enveloppe with 4 cable entries for the lights and one for the power supply
- ✦ Photocell integrated : 'day&night' or 'night only' operation
- ✦ Surge protection included
- ✦ alarm activated in case of failure of the power supply or failure of the light(s)
- ✦ possibility to connect 1 to 4 combi lights low intensity type (red fixed) circuit + infrared (IR) blinking circuit
- ✦ 3 power supply available : 12-24VDC, 48VDC and 110 to 240VAC

Electrical Characteristics	
Main voltage	12VDC to 24VDC (-10%; +15%), 48VDC (-10%; +15%) and 110 to 240VAC
Mechanical Characteristics	
IP degree	IP65 in vertical position
Dimensions	160 x 58 mm
Weight	300g
Cable entry diameter	6,5-12 mm & 4-10mm
Wire cross section	from 1 to 2,5 mm <sup>2</sup>
Attachment	4 screws type M4
Position of the 4 mounting holes	148 x 50 mm