


Monitoring and control box



- ✦ cable inputs by gland nickel plated brass
- ✦ terminal connections for 1 medium intensity lights OFC-RI-REM red flashing or red fixed
- ✦ Individual alarm (normally closed and normally open both available) and visual indicator of the light
- ✦ surge protection
- ✦ connection of obsta photocell 100757
- ✦ on/off switch and remote/manual switch to bypass the photocell
- ✦ IoT gateway obstalink for the light, the photocell and 24Vdc power supply control

Les dimensions sont en mm
All dimensions are in mm

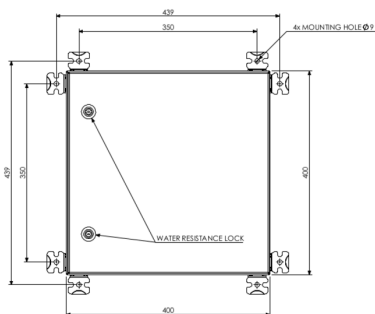

Electrical Characteristics

Wattage	60 W
Main voltage	24VDC (-10%; +15%)
Mechanical Characteristics	
IP degree	IP65 in vertical position
Weight	16 kg
Size of the power supply	590mm (height) x 350mm (width) x 250mm (dept)