


## Monitoring and control box



- stainless steel enclosure
- cable inputs by gland nickel plated brass
- 8 terminal connections for max 8 medium intensity lights and/or side lights red fixed or mimic with medium intensity red flashing
- individual alarms (normally closed and normally open both available) and visual indicator for each light (or group of light)
- surge protection
- connection of optional photocell
- alarm (normally closed and normally open both available) for the photocell and for the power supply
- on/off switch and remote/manual switch to bypass the photocell

Option provided with external photocell

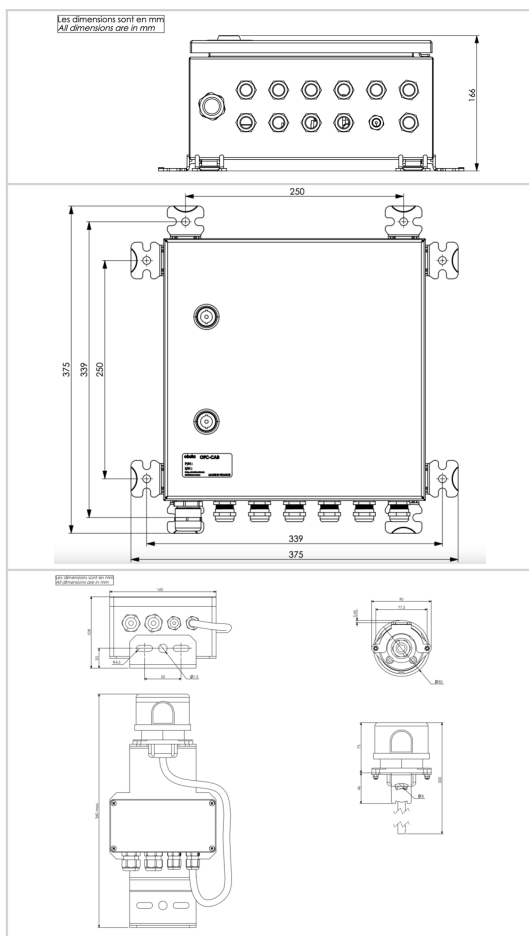

| Electrical Characteristics |  |
|----------------------------|--|
| Wattage                    | 10W max (controller)   |
| Main voltage               | 48VDC (-10%; +15%)   |
| Max. admissible current    | 10A  |
| Mechanical Characteristics |  |
| IP degree                  | IP65 in vertical position  |
| Weight                     | 4.8 kg   |
| Size of the power supply   | 344mm (height) x 346mm (width) x 166mm (dept)                                |
| Weight                     | 3,5kg  |
| Cable entry diameter       | from 7 to 13 mm  |
| Wire cross section         | up to 6mm <sup>2</sup> for power supply, up to 2,5mm <sup>2</sup> for signal |
| Attachment                 | 4 screws type M5   |