
OFP-180-RW-JBL-HIB-ETISSALAT [P/N: 113791B]

Led high intensity type B flashhead (or double dual color medium intensity with one level main and a second level as a back-up) - Compliant with high intensity type B according to ICAO annex 14 chapter 6 edition 2013 - This flashhead should be used with an OBSTA power cabinet



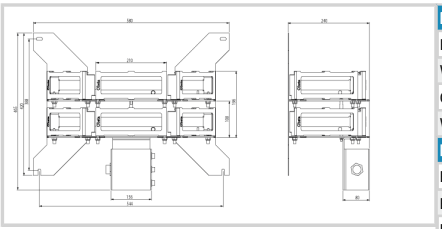

Mechanical Characteristics	
IP degree	IP66 per projector
Wiring	Connectors L
Operating temperature	-40/+55°C
Weight	5 kg
Photometric Characteristics	
Effective light output day time at 0° on site	100 000cd (white)
Effective light output twilight mode at 0° on site	20 000cd (white)
Effective light output night mode at 0° on site	2000cd (white)
Color day/twilight time	white
Color night time	Red or white
Vertical beam spread	>3°
Horizontal beam spread	360° with minimum 2 flashheads on opposite side
Flash per minute	40
Standards	
Standards compliance	ICAO annexe 14 chapter 6 (8th edition 07/2018), EASA (4th edition 2017)