
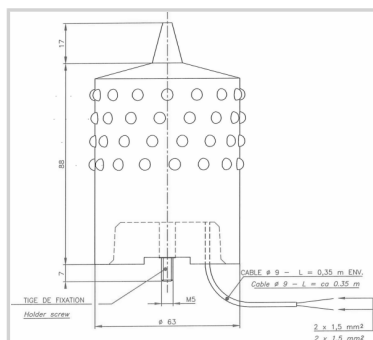


## Red fixed low intensity type A and B

230VAC light including

- one NAVILITE-48V-CABLE lamp (113905) provided with 35cm of mold cable
- one transformer 230VAC->48Vdc (113911) with good EMC immunity

The stainless steel bracket NAVILITE-HOLDER to fix both the lamp and its transformer has to be ordered separately

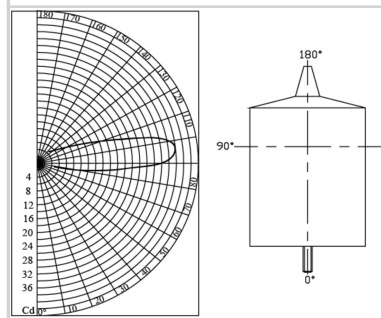

| Electrical Characteristics  |                                                                         |
|-----------------------------|-------------------------------------------------------------------------|
| Wattage                     | 6 W                                                                     |
| Current drawn               | 70 mA                                                                   |
| Life time                   | ~10years                                                                |
| Main voltage                | 230VAC +/-10%                                                           |
| Mechanical Characteristics  |                                                                         |
| IP degree                   | IP66 for the light and IP65 for the power supply                        |
| Wiring                      | Terminal connection (2 power wires)                                     |
| Operating temperature       | -40/+55°C                                                               |
| Weight                      | 1.4 kg                                                                  |
| Size of the light           | 112mm (height) x 63mm (over diameter)                                   |
| Wire cross section          | from 1 to 2,5 mm²                                                       |
| Attachment                  | 1 screw M5 provided                                                     |
| Photometric Characteristics |                                                                         |
| Luminous intensity          | > 32cd                                                                  |
| Color night time            | Red fixed                                                               |
| Vertical beam spread        | >10°                                                                    |
| Horizontal beam spread      | 360°                                                                    |
| Standards                   |                                                                         |
| Standards compliance        | ICAO annexe 14 chapter 6 (8th edition 07/2018), EASA (4th edition 2017) |