
NAV-HI-CMD-48 [P/N: 113941]


Monitoring box allowing the control and the wiring of 1 or 2 NAVILITE 48VDC beacons P/N113930 or 113935, operating at night only or continuously, plugged to work simultaneously or 2 in redundancy (a main light and a backup light working only in case the main light is not working) with remote signalization in case of failure of the light or failure of the 48VDC supply



- Control 1 or 2 NAVILITE HI 113930* or 113935* either
  - With an active redundancy (one main lamp and one back-up lamp switched on in case of failure of the main lamp)
  - or a simultaneous operation of 2 lights
- Control the day/night switching of the lights
- Allow remote monitoring in case of lamp failure or power supply failure by potential free contact

(*: instead of 1 lamp 113930 or 113935, it is possible to connect 3 lamps P/N113900, 113905 or 113965 in parallel)

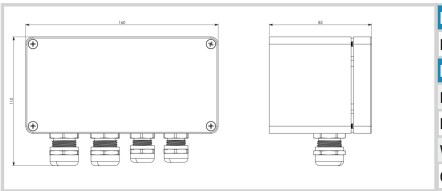

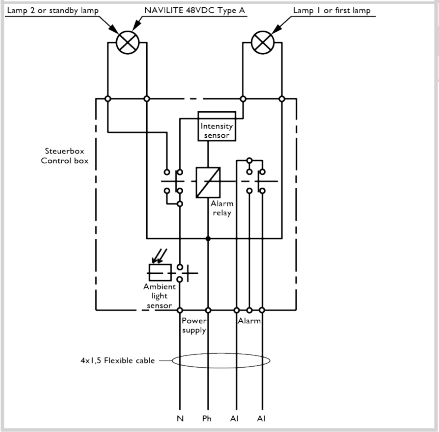

Electrical Characteristics	
Main voltage	48VDC (-10%; +15%)
Mechanical Characteristics	
IP degree	IP65 in vertical position
Dimensions	160 x 58 mm
Weight	300g
Cable entry diameter	6,5-12 mm & 4-10mm
Wire cross section	from 1 to 2,5 mm²
Attachment	4 screws type M4
Position of the 4 mounting holes	148 x 50 mm