
NAV-CMD-12V [P/N: 113942]

12VDC command box for 2 NAVILITE-SOL P/N113903 in the configuration 'main and back-up'. This command box allows automatic switch from the main light to the back-up light in case of failure of the main light



• Polycarbonate enveloppe • cable entries • 3 terminals connections (12V power supply, main lamp, back-up lamp)

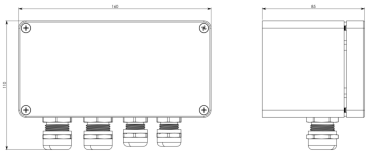

Conditions de mise en alarme :
– faible consommation de(s) lampe(s)
– mise en court–circuit de(s) lampe(s)
– manque d'alimentation

Alarm conditions :
– low intensity of the lamp(s)
– short–circuit of the lamp(s)
– power supply failure

Electrical Characteristics	
Main voltage	12VDC (-10%; +15%)
Mechanical Characteristics	
IP degree	IP65 in vertical position
Weight	0.23 kg
Cable entry diameter	6,5-12 mm & 4-10mm
Wire cross section	from 1 to 2,5 mm²
Attachment	4 screws type M4