

OFI-CAB-1E-RW-240-U [P/N: 113797UA]

110VAC to 240VAC stainless power cabinet for 48Vdc obstaflash dual color kits (max 20A)

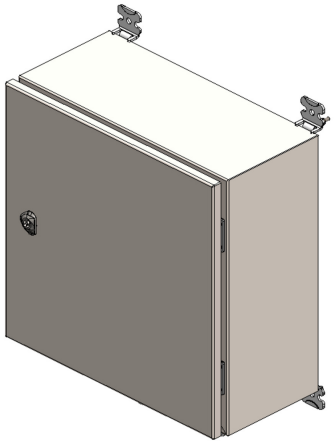

- 'Weather tight' stainless steel 316L power cabinet enclosure
- Test button for day and night
- Alarm dry contact NC and NO
- Master/slave configuration for multiple lights synchronisation
- to be used with photocell 48Vdc
- in option low intensity lights NAVILITE 48Vdc for night only operation,
- wireless gps synchronisation P/N113746

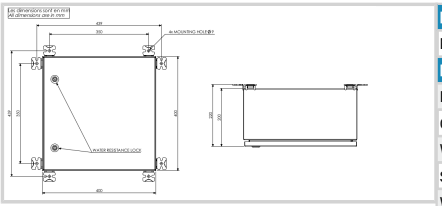

Electrical Characteristics	
Main voltage	110VAC to 240VAC +/-10% 50/60Hz
Mechanical Characteristics	
IP degree	IP65 in vertical position
Operating temperature	-20/+45°C
Weight	8 kg
Size of the power supply	590mm (height) x 350mm (width) x 250mm (dept)
Wire cross section	from 1 to 4 mm²