

# 48V-NAV-CMD-120/240 [P/N: 113912]

***Monitoring box allowing the control of NAVILITE 48VDC beacon(s), working at night only or continuously, plugged to work simultaneously (4 maximum) or in redundancy (a main light and a backup light working in case of failure of the main light) with remote signalization in case of failure of the light or he 230VAC supply.***

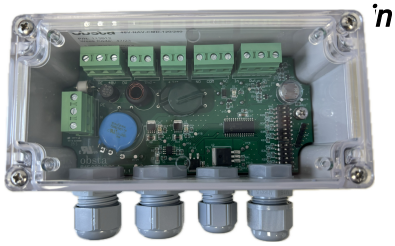

- Polycarbonate enveloppe with 4 cable entries
- Photocell integrated : 'day&night' or 'night only' operation
- Surge protection included
- alarm activated in case of failure of the power supply or failure of the lights
- 'main & back-up operation for 2-4 lights' or working simultaneously for 1 to 4 lights
- possibility to configure 1 to 4 NAVILITE 48VDC in fixed mode or flashing mode (low intensity type E, L-810(F))

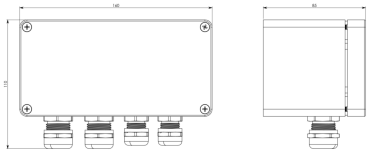

Conditions de mise en alarme :
– faible consommation de(s) lampe(s)
– mise en court–circuit de(s) lampe(s)
– manque d'alimentation

*Alarm conditions :*
*– low intensity of the lamp(s)*
*– short–circuit of the lamp(s)*
*– power supply failure*

| Electrical Characteristics | |
|---|---|
| Wattage | 24W |
| Main voltage | 110VAC to 240VAC +/-10% 50/60Hz |
| **Mechanical Characteristics** | |
| IP degree | IP65 in vertical position |
| Dimensions | 160 x 58 mm |
| Weight | 300g |
| Cable entry diameter | 6,5-12 mm & 4-10mm |
| Wire cross section | from 1 to 2,5 mm² |
| Attachment | 4 screws type M4 |
| Position of the 4 mounting holes | 148 x 50 mm |