

HELITE-G-24 [P/N: 113975]

Touchdown and lift-off area lighting (TLOF)



- hard glass
- compact
- low power consumption
- compliant with ICAO
- 10-36VDC power supply
- FAA ¾"NPT threaded hole for mounting
- Yellow frangible base with threaded hole P/N113976 to be ordered separately

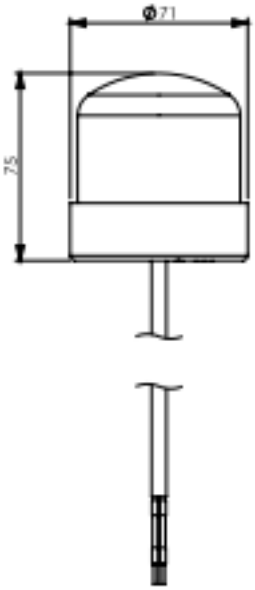

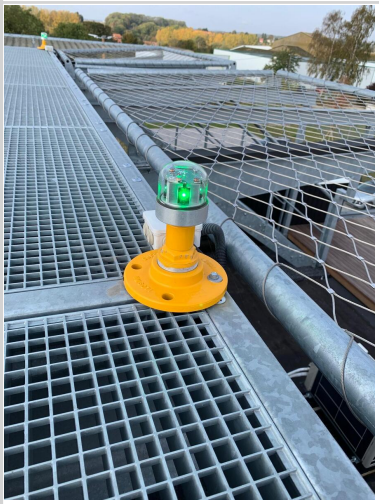

Electrical Characteristics	
Wattage	3W (inrush 1A)
Main voltage	10VDC to 36VDC
Mechanical Characteristics	
IP degree	IP 66
Operating temperature	-40/+55°C
Color	green
Weight	500 kg
Attachment	1 NPT threaded holes or 3 M4 0.7
Photometric Characteristics	
Luminous intensity	> 32cd
Standards	
Standards compliance	ICAO Annex 14, Volume II – Heliports and Volume 1