
STI-CMD-120 [P/N: 113142-120]

Monitoring and control box



Monitoring box

- painted and molded aluminum boxes
- cable inputs by gland nickel plated brass
- monitoring up to 6 lights in simultaneous operation (or 6 pairs of 2 lights main and back-up)
- connection of the photocell, the default information and the lights through additional junction box P/N113141
- 2 waterproof switches (on/off switch and remote/manual switch to bypass the photocell)
- led indicator for the presence of power supply voltage
- led indicator for the information lights switch on or switch off
- 2 led indicators for the status of the main lights and the back-up lights

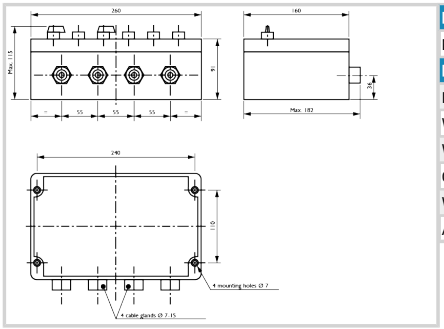

Electrical Characteristics	
Main voltage	120VAC +/-10%
Mechanical Characteristics	
IP degree	IP65 in vertical position
Weight	2,8 kg
Weight	2,8 kg
Cable entry diameter	from 8 to 15 mm
Wire cross section	from 1 to 4 mm²
Attachment	4 screws type M5