
OFC-CTR-6E-3F-6A-240 [P/N: 113176-6E-6A]

Monitoring and control box



- cable inputs by gland nickel plated brass
- terminal connections for medium intensity lights OFC-RR-240 and for NAVILITE-120-240
- surge protection
- connection of the photocell, default information of lights
- on/off switch and remote/manual switch to bypass the photocell

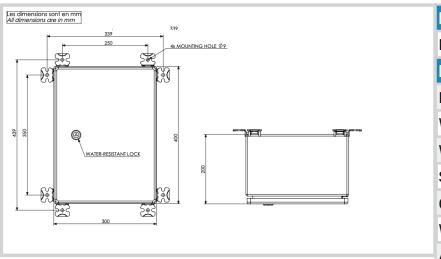

Electrical Characteristics	
Main voltage	230VAC +/-10%
Mechanical Characteristics	
IP degree	IP65 in vertical position
Weight	3,5kg
Weight	3,5kg
Size of the power supply	315mm (height) x 210mm (width) x 110mm (dept)
Cable entry diameter	from 8 to 15 mm
Wire cross section	from 1 to 4 mm²
Attachment	4 screws type M5