
OFC-CTR-240 [P/N: 113176-240]

Monitoring and control box



- stainless steel enclosure
- cable inputs by gland nickel plated brass
- 8 terminal connections for max 8 medium intensity lights and/or side lights red fixed or mimic with medium intensity red flashing
- individual alarms (normally closed and normally open both available) and visual indicator for each light (or group of light)
- surge protection
- connection of optional photocell
- alarm (normally closed and normally open both available) for the photocell and for the power supply
- on/off switch and remote/manual switch to bypass the photocell

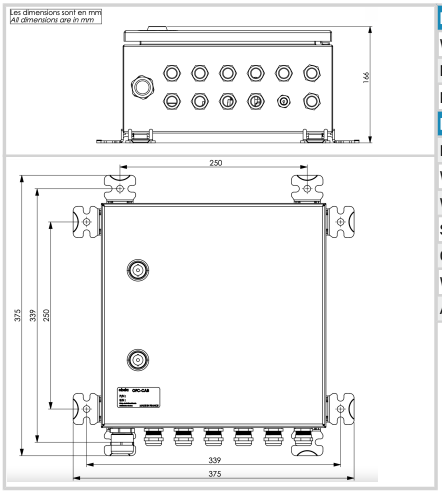

Electrical Characteristics	
Wattage	10W max (controller)
Main voltage	110VAC to 240VAC +/-10% 50/60Hz
Max. admissible current	10A
Mechanical Characteristics	
IP degree	IP65 in vertical position
Weight	3,5kg
Weight	3,5kg
Size of the power supply	344mm (height) x 346mm (width) x 166mm (dept)
Cable entry diameter	1x M25 - 9 to 16 mm, 11x M20 - 6 to 13 mm; 1 PG09 - 4 to 8 mm
Wire cross section	up to 6mm² for power supply, up to 2,5mm² for signal
Attachment	4 screws type M5