
48V-NAV-CTR-RI-48-IOT [P/N: 113912-RI-048-IOT]

Control cabinet for NAVILITE-IR-48V-CABLE



- 'Weather tight' stainless steel 316L power cabinet enclosure
- Output for 1 to 4 NAVILITE-RI-48V-CABLE
- synchronization of infrared leds
- Continuous power supply of red leds
- Test button to bypass photocell and force lights to be switch on during daytime
- Alarm
- Master/slave configuration for multiple cabinet synchronization
- Type 2 surge protection
- in option wireless gps synchronisation P/N113746 and GSM interface

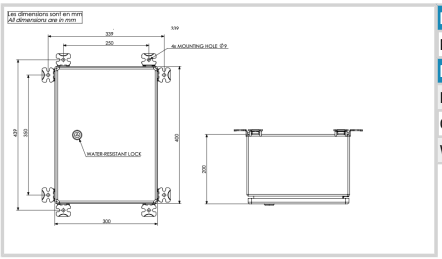

Electrical Characteristics	
Main voltage	48VDC (-10%; +15%)
Mechanical Characteristics	
IP degree	IP65 in vertical position
Operating temperature	-20/+45°C
Wire cross section	from 1 to 4 mm²