OFP-CAB-2B-RW-240-6M25 [P/N: 114211]

Spare part for led lights




Power supply for up to 6 flash-heads OFP-120-RW-JB (or 6 OFP-120-RW-15 with 2 junction boxes OFP-JB-8P-RW)

- 'Weather tight' stainless steel 316L power cabinet enclosure
- 8 independant power supplies providing a high redundancy level
- Test button for day, twilight and night
- Alarm dry contact NC and NO activated in case 1 or 2 led projectors not operating
- Surge protection included
- Controlled by internal GPS or external controller (to be ordered separately)
- GPS as a back-up (both flash and day/twilight/night mode) in case of default of external controller

To be used with obsta medium or high intensity flash-head(s)

- drive up to 12 obsta projectors (dual color mode) coming with molded cable

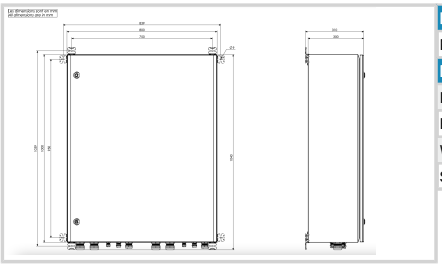

Electrical Characteristics	
Main voltage	110VAC to 240VAC +/-10% 50/60Hz
Mechanical Characteristics	
IP degree	IP 66
Housing material	RAL7032 Steel
Weight	30 kg
Size of the power supply	1000mm x 800mm x 300mm