
NAVILITE-HI-230V-KIT [P/N: 113939-KIT]


Red fixed low intensity type A and B



- Completely molded and perfectly waterproof with AC power supply installed below the light
- Bird spike
- No grounding issue, class II
- Total 192 leds wired in 48 independant circuits of 4 leds each
- Luminous intensity 3 times higher than ICAO/FAA

The NAVILITE HI 230VAC P/N113939-KIT is provided with a stainless bracket for vertical or horizontal installation as per the drawing below

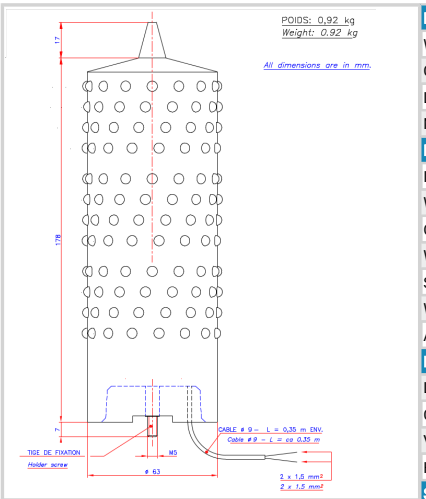

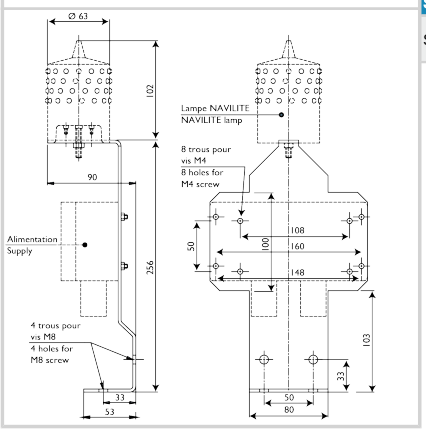

Electrical Characteristics	
Wattage	12 W
Current drawn	200mA
Life time	~10years
Main voltage	230VAC +/-10%
Mechanical Characteristics	
IP degree	IP66 for the light and IP65 for the power supply
Wiring	Terminal connection (2 power wires)
Operating temperature	-40/+55°C
Weight	2.5 kg
Size of the light	194mm (height) x 63mm (over diameter)
Wire cross section	from 1 to 2,5 mm²
Attachment	1 screw M5 provided
Photometric Characteristics	
Luminous intensity	> 90 Cd
Color night time	Red fixed
Vertical beam spread	>10°
Horizontal beam spread	360°
Standards	
Standards compliance	ICAO annexe 14 chapter 6 (8th edition 07/2018), EASA (4th edition 2017)