


Red fixed low intensity type A and B



- Light part completely molded with 4 levels of leds
- Redundant circuits for LED's : 16 circuits of 4 LEDs in redundancy
- No rise from the ground potential (due to lightning for example)
- Bird spike

The stainless bracket NAVILITE-HOLDER for mounting shall be order separately

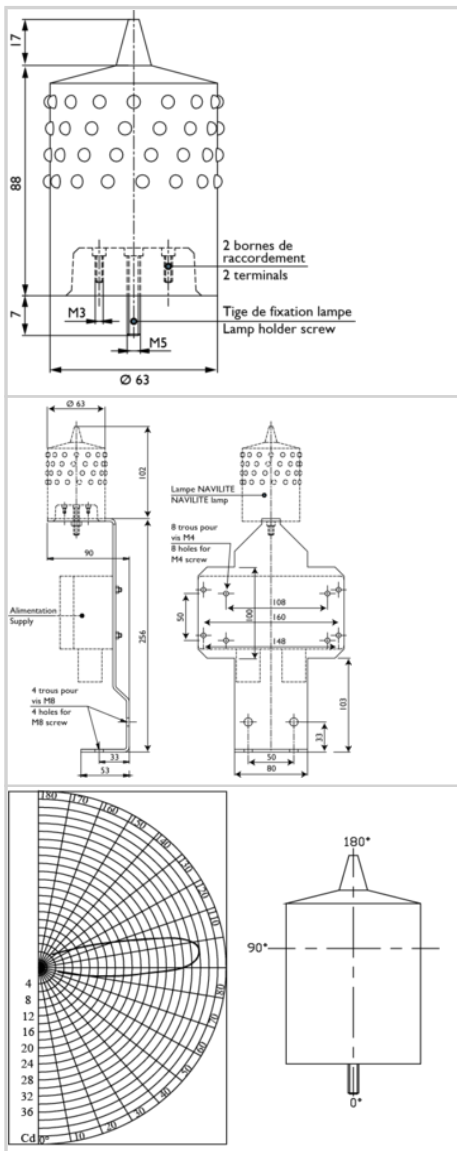

| Electrical Characteristics | |
|-----------------------------|---|
| Wattage | 6 W |
| Current drawn | 125 mA |
| Life time | ~10years |
| Main voltage | 48VDC ± 10% |
| Mechanical Characteristics | |
| IP degree | IP66 |
| Wiring | Terminal connection by 2 pods |
| Operating temperature | -40/+55°C |
| Weight | 0.37 kg |
| Size of the light | 112mm (height) x 63mm (over diameter) |
| Weight | 370g |
| Attachment | 1 screw M5 provided |
| Photometric Characteristics | |
| Luminous intensity | > 32cd |
| Color night time | Red fixed |
| Vertical beam spread | >10° |
| Horizontal beam spread | 360° |
| Standards | |
| Standards compliance | ICAO annexe 14 chapter 6 (8th edition 07/2018), EASA (4th edition 2017) |