


**110VAC to 240VAC stainless power cabinet for one obstafash P/N113736**

**Power supply**

- ✦ 'Weather tight' stainless steel 316L power cabinet enclosure
- ✦ one luminous indicator per flashhead,
- ✦ maximum 6 flashhead P/N113736 per cabinet (in case of more than 1 flashhead, the part number is 113727NX with X 2 to 6 flashheads)
- ✦ Test button for remote (photozell), day and night position
- ✦ Alarm dry contact NC and NO
- ✦ Master/slave configuration in case of multiple lights synchronisation
- ✦ Surge protection
- ✦ in option side lights L810 / low intensity type B for night only operation (or L810(F))

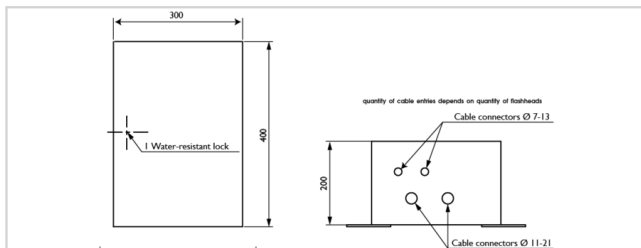

Electrical Characteristics	
Mains voltage	110VAC to 240VAC +/-10% 50/60Hz
Mechanical Characteristics	
IP degree	IP65 in vertical position
Operating temperature	-40/+55°C
Wire cross section	from 1 to 4 mm <sup>2</sup>