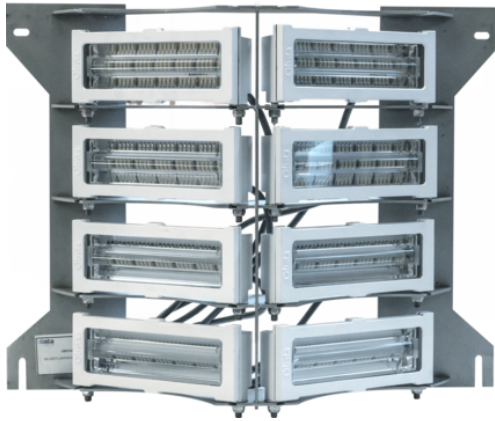
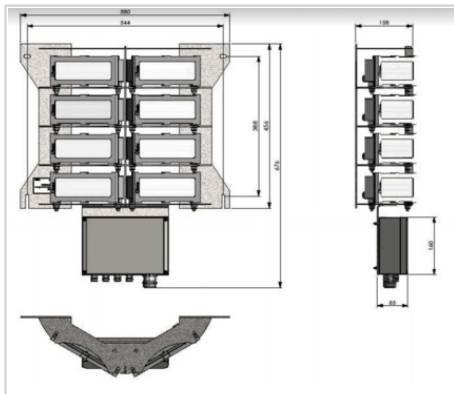


Spare part for led lights


**Flashhead**

- 8 led projectors with molded cable with ou without connectors
- Aluminium and glass enveloppe
- Stainless support for the 8 projectors
- No losing parts and no special tools required to remove projectors
- Junction box and/or power supply to be ordered separately

 Option **length of cable : 2 meters**


Mechanical Characteristics	
IP degree	IP66 per projector
Wiring	On stripped wires (2 meters)
Operating temperature	-40/+55°C
Weight	14kg for flashhead
Photometric Characteristics	
Effective light output day time at 0° on site	200 000cd (white)
Effective light output twilight mode at 0° on site	20 000cd (white)
Effective light output night mode at 0° on site	2000cd (white)
Color day/twilight time	white
Color night time	White
Vertical beam spread	> 3°
Horizontal beam spread	360° with minimum 3 flashheads fixed at 120° around the obstacle
Standards	
Standards compliance	ICAO annexe 14 chapter 6 (8th edition 07/2018), EASA (4th edition 2017)