


Monitoring and control box



- cable inputs by gland nickel plated brass
- terminal connections for 1 medium intensity lights OFC-RI-REM red flashing or red fixed
- alarm and visual indicator of the light and the GPS
- surge protection
- connection of obsta photocell 100757 (to be ordered separately)
- on/off switch and remote/manual switch to bypass the photocell
- IoT gateway obstalink pre-wired for the control of the light, the photocell and 48Vdc power supply control (to be ordered separately)

Option provided with GPS (day/twilight/night sync and flash sync)

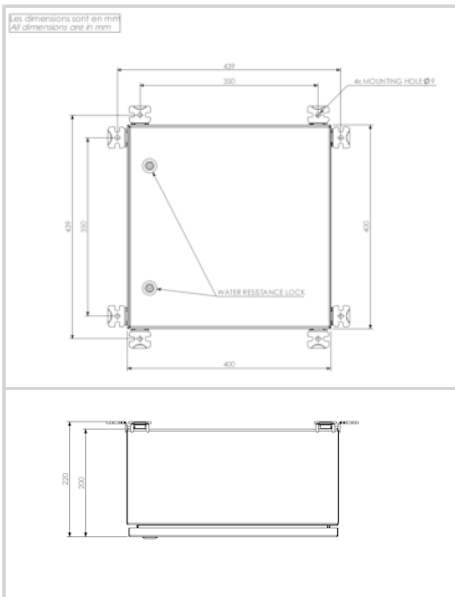

Electrical Characteristics	
Wattage	60 W
Main voltage	48VDC (-10%; +15%)
Mechanical Characteristics	
IP degree	IP65 in vertical position
Weight	16 kg
Size of the power supply	590mm (height) x 350mm (width) x 250mm (dept)