


The red medium intensity type B or C flashhead OBSTAFLASH120 is designed for night marking of obstacle such as stacks, intermediate pylons with 3 legs, facade of high rise buildings. A system that includes 3 red OBSTAFLASH120 120° around the obstacle and an OBSTA power cabinet complies with ICAO red medium intensity type B (or type C, CAA) and FAA L-864.

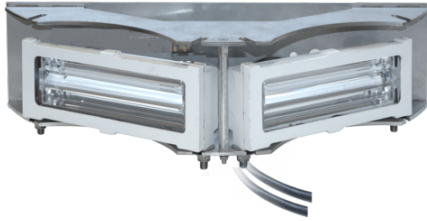


This flashhead includes

- 2 red projectors in glass and aluminium coming with molded cable with a length of X meters (0,75, 5, 10 or 15 meters to be specified at time order)
- Stainless support for the 2 projectors

Each projector must be connected (through a junction box to be order separately) to an external obsta power cabinet

Patents: EP3230651, FR1462349, Pat. 10,247,386

Option Length of molded cable : 75 cm

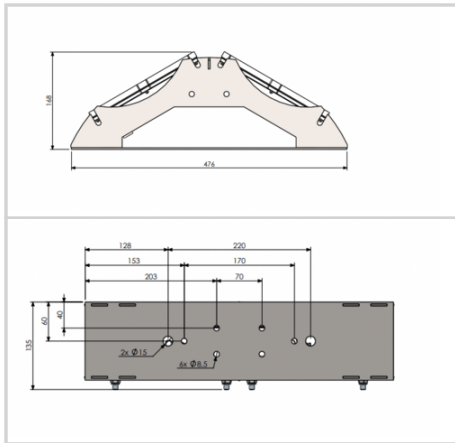

Electrical Characteristics	
Average wattage	8W (night time only @ 30fl per minute)
Mechanical Characteristics	
Wiring	On stripped wires
Operating temperature	-40/+55°C
Size of the light	120mm (height) x 480mm (width)
Weight	3,5kg
Photometric Characteristics	
Effective light output night mode at 0° on site	2000cd (red) with IR
Color night time	Red
Vertical beam spread	>3°
Horizontal beam spread	360° with minimum 3 flashheads fixe at 120° around the obstacle
Flash per minute	30
Standards	
Standards compliance	ICAO annex 14 chapter 6, FAA (AC 150/5345-43H), EASA, DGAC, CAA (CAP 168)